



CATALOGUE 2026/2027

Contents

HM 50	8
H 35	10
H 60	12
H 50	14
H 65	16
H 72	18
H 75	20
H 85	22
H 100	24
H 110	26
H 125	28
H 135	30
H 155	32
H 175	34
H 190	36
H 220	38
HD 100 B	40
HD 100 L	42
HD 100 P	46
HD 115	50
Container	52
Logistics	54
Single ramps	56
Accessibility ramps	58

Contents

Van ramps

60



ABOUT US

LOADING SYSTEMS IN ALUMINIUM ALLOY

DIMA S.r.l. specialises in the development, manufacture and sale of aluminium alloy loading and unloading systems. With extensive experience in the sector, we are an established manufacturer in Italy and Europe, offering reliable, safe, high-quality solutions.

Our experience in processing high-quality primary aluminium alloys, forming and welding to strict quality standards enables us to offer a wide range of robust, lightweight systems for the daily transport of vehicles and people.

Quality and safety

Our range provides a solution offering maximum safety for every loading and unloading need. Our systems are designed and manufactured in strict compliance with the applicable standards. During type approval, each product is tested at twice its declared load capacity (safety factor 2.1). Every product is supplied with an instruction manual, warnings and the manufacturer's declaration of conformity.

Our standard range forms the basis of our offering. We also assess and manufacture special solutions to customer specifications.

Production and technology


Our in-house production is organised to respond flexibly and efficiently to frequent changes in manufacturing. Modern automatic equipment and the manual work of highly qualified staff ensure excellent product quality. Careful finishing, packaging and well-organised logistics ensure on-time deliveries.



HM50



Isometric view

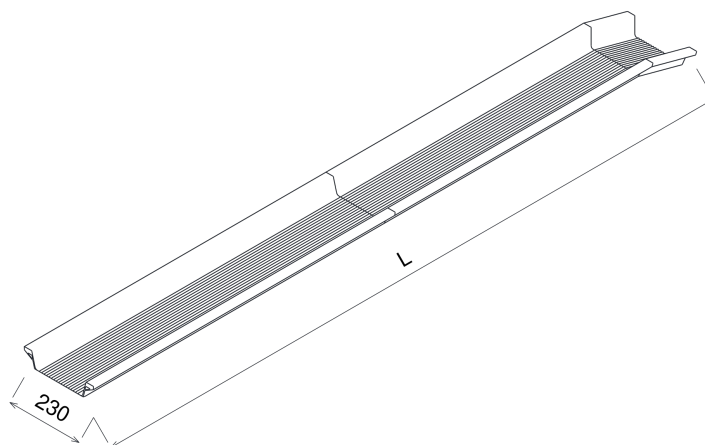

Categories

 Earthmoving

 Gardening

 Logistics

 Trailers

 Accessibility

 Motorcycles

 Container

Dimensions


Length

1000 - 4000 mm


Weight per pair

8 - 36 kg


Upper end detail

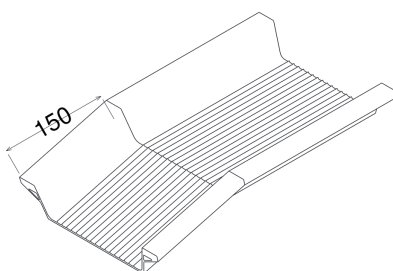

Cross-section



Securing devices

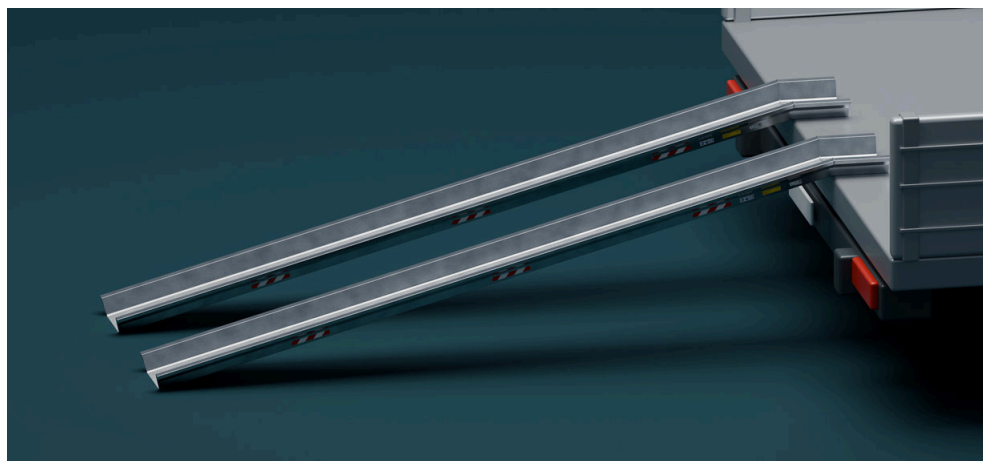

HM50 / dedicated connection

Compact aluminium ramps for gardening and logistics.

The HM50 range combines a compact profile with a lightweight, robust aluminium structure.



Ideal for loading small machines and garden equipment, it is also suitable for logistics.

The integrated ribbed running surface provides good grip.

Available in fixed or folding versions, with a width of 230 mm and a choice of lengths.

	Code	Wheelbase 750 mm kg	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
Standard	HM 1000/230	1700 kg	1800 kg	-	1000	230	155	45	8	144.00
	HM 1500/230	1400 kg	1500 kg	1500 kg	1500	230	155	45	12	216.00
	HM 2000/230	1200 kg	1300 kg	1300 kg	2000	230	155	45	16	288.00
	HM 2500/230	832 kg	932 kg	932 kg	2500	230	155	45	20	360.00
	HM 3000/230	629 kg	729 kg	729 kg	3000	230	155	45	24	432.00
	HM 3500/230	459 kg	594 kg	594 kg	3500	230	155	45	29	522.00
	HM 4000/230	403 kg	503 kg	503 kg	4000	230	155	45	33	612.00
Folding	HM 1000/230P	1190 kg	1260 kg	-	1000	230	155	45	10	260.00
	HM 1500/230P	980 kg	1050 kg	1050 kg	1500	230	155	45	14	332.00
	HM 2000/230P	840 kg	910 kg	910 kg	2000	230	155	45	18	404.00
	HM 2500/230P	582 kg	652 kg	652 kg	2500	230	155	45	22	476.00
	HM 3000/230P	440 kg	510 kg	510 kg	3000	230	155	45	26	548.00
	HM 3500/230P	321 kg	416 kg	416 kg	3500	230	155	45	31	638.00
	HM 4000/230P	282 kg	352 kg	352 kg	4000	230	155	45	36	728.00

The table values refer to a pair of ramps.

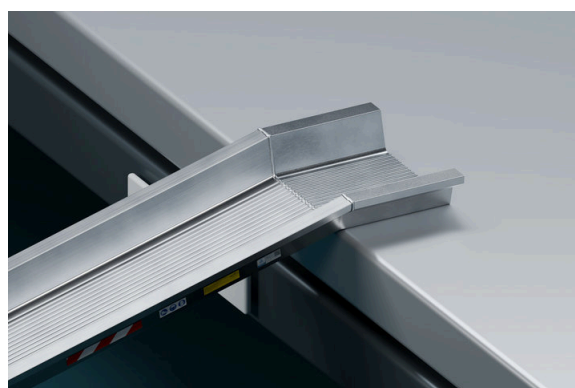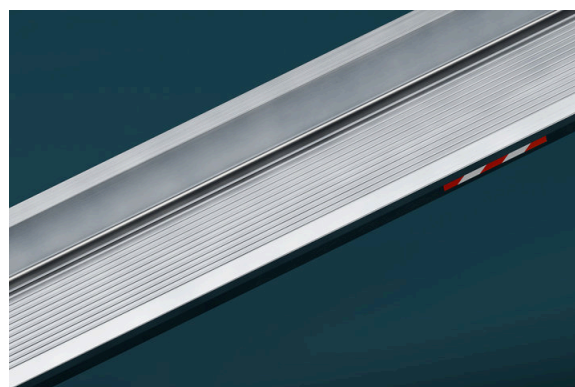

H35



Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1500 - 3500 mm


Weight per pair

10 - 26 kg


Securing devices




Side view




Without edges

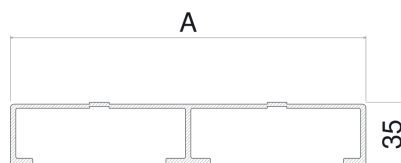



TS



TA



Running surface

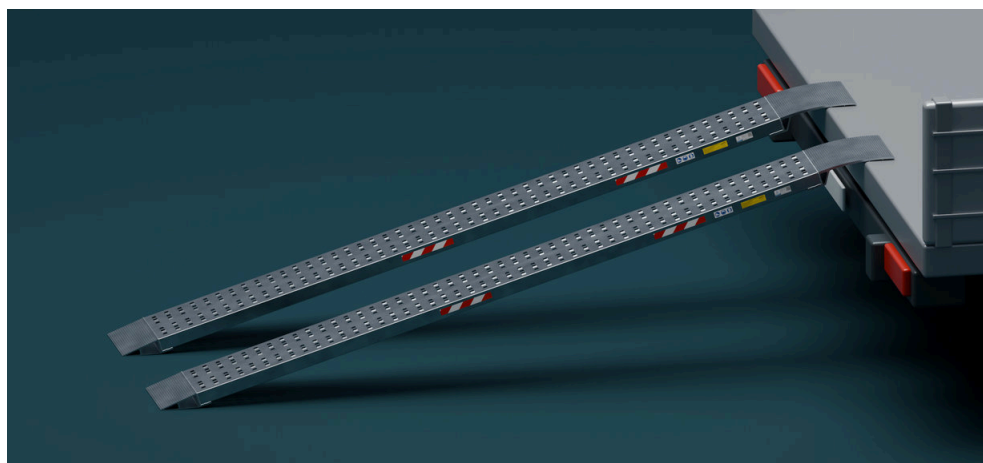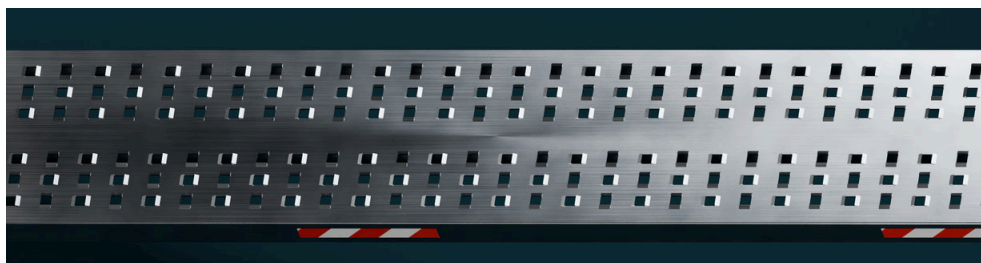

H35 / upper end TS



Lightweight aluminium ramps for cars, vans and small vehicles.

Fixed or folding H35 ramps are an ideal solution for light loading applications.

The punched running surface provides good grip. The openings allow water and other materials to drain away, keeping the loading surface clean. The H35 range is therefore well suited to loading motorcycles, quad bikes, lawnmowers and many other vehicles.

		Code	Head	Wheelbase 500 mm kg	Wheelbase 750 mm kg	Wheelbase 1000 mm kg	Length mm	Ext. width mm	Weight kg	Price €
Without edges	Standard	H 35/15S	TS, TA	1000 kg	1350 kg	1535 kg	1500	200	10	185.22
		H 35/20S	TS, TA	600 kg	780 kg	1000 kg	2000	200	13	243.65
		H 35/25S	TS, TA	450 kg	530 kg	610 kg	2500	200	16	296.57
		H 35/30S	TS, TA	360 kg	390 kg	425 kg	3000	200	20	370.44
		H 35/35S	TS, TA	245 kg	275 kg	320 kg	3500	200	23	425.57
	Folding	H 35/15SP	TS, TA	480 kg	480 kg	480 kg	1500	200	12	370.44
		H 35/20SP	TS, TA	380 kg	380 kg	380 kg	2000	200	15	428.87
		H 35/25SP	TS, TA	300 kg	300 kg	300 kg	2500	200	18	481.79
		H 35/30SP	TS, TA	250 kg	250 kg	250 kg	3000	200	22	555.66
		H 35/35SP	TS, TA	180 kg	180 kg	180 kg	3500	200	26	611.89

The table values refer to a pair of ramps.

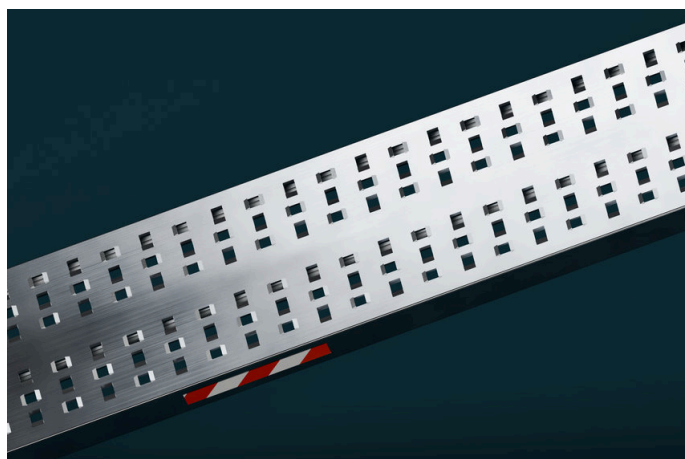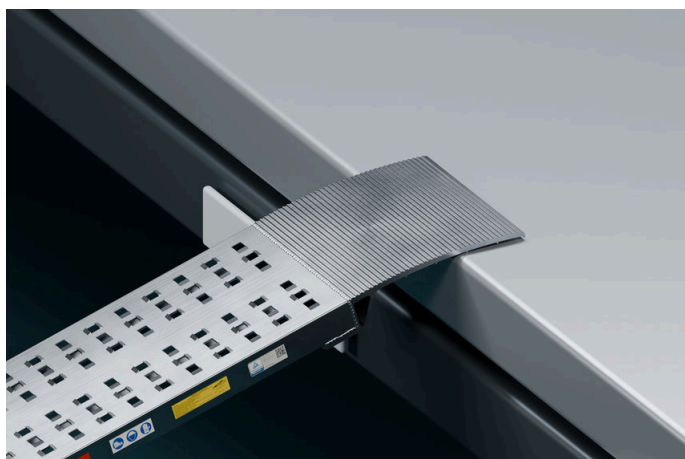

H60



Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1500 - 3500 mm


Weight per pair

15 - 51 kg


Securing devices




Side view




Without edges

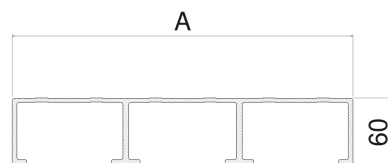


TS

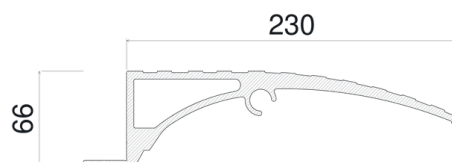



TG

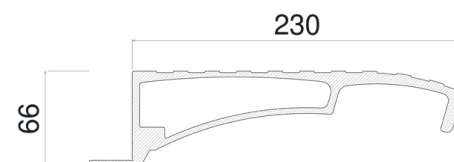


TO



TGC

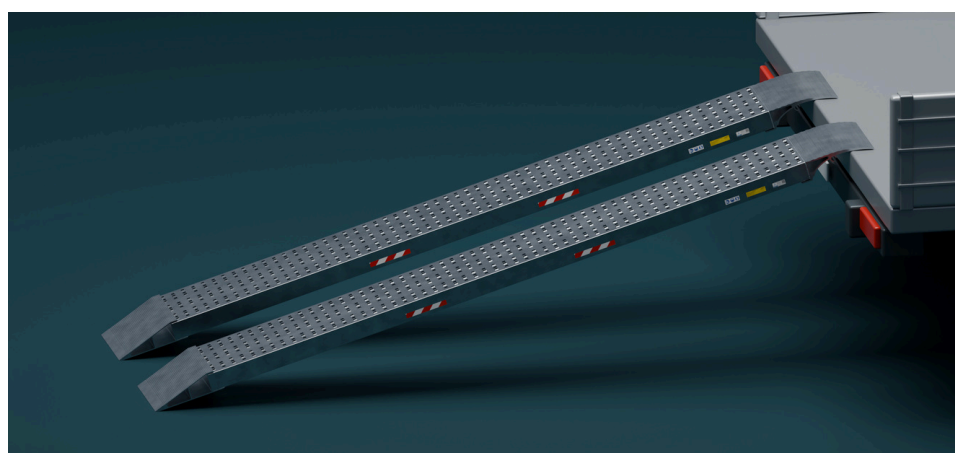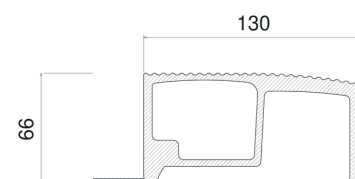

H60 / upper end TS

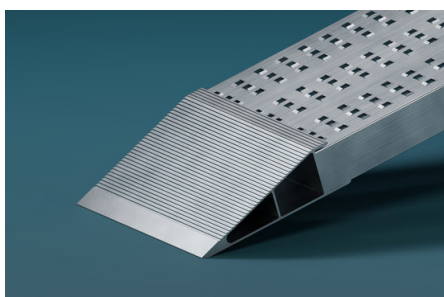

Lower end detail



Upper end in position



Versatile ramps for medium loads. Robust construction for pallet trucks and small forklifts.

The H60 range offers capacities of up to 1,750 kg per pair, depending on ramp length and wheelbase. Suitable for loading vehicles and equipment, it has an integrated running surface.

A folding version is also available for easier transport and storage.

		Code	Head	Wheelbase 750 mm kg	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Length mm	Ext. width mm	Weight kg	Price €
Without edges	Standard	H 60/15S	TS, TG, TO, TGC	1750 kg	1750 kg	1750 kg	1500	300	20	370.44
		H 60/20S	TS, TG, TO, TGC	1700 kg	1700 kg	1700 kg	2000	300	27	500.09
		H 60/25S	TS, TG, TO, TGC	1650 kg	1700 kg	1700 kg	2500	300	34	606.60
		H 60/30S	TS, TG, TO, TGC	1250 kg	1405 kg	1610 kg	3000	300	41	730.46
		H 60/35S	TS, TG, TO, TGC	990 kg	1090 kg	1215 kg	3500	300	48	856.64
	olding	H 60/15SP	TS, TG, TO, TGC	1220 kg	1220 kg	1220 kg	1500	300	23	578.81
		H 60/20SP	TS, TG, TO, TGC	1090 kg	1090 kg	1090 kg	2000	300	30	708.47
		H 60/25SP	TS, TG, TO, TGC	1000 kg	1000 kg	1000 kg	2500	300	37	815.85
		H 60/30SP	TS, TG, TO, TGC	950 kg	950 kg	950 kg	3000	300	44	938.84
		H 60/35SP	TS, TG, TO, TGC	750 kg	750 kg	750 kg	3500	300	51	1,065.02



The table values refer to a pair of ramps.

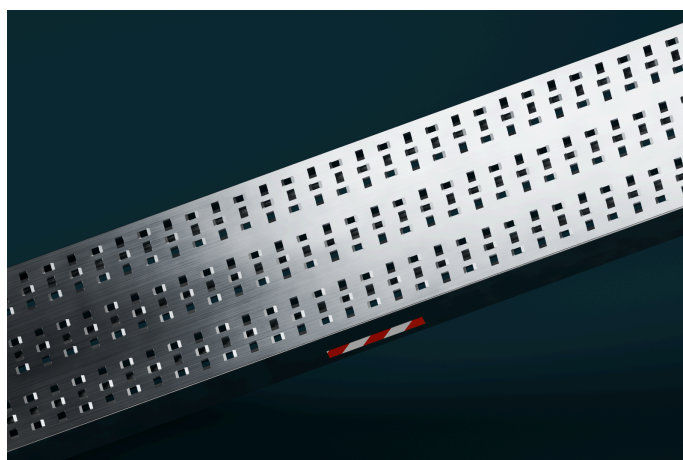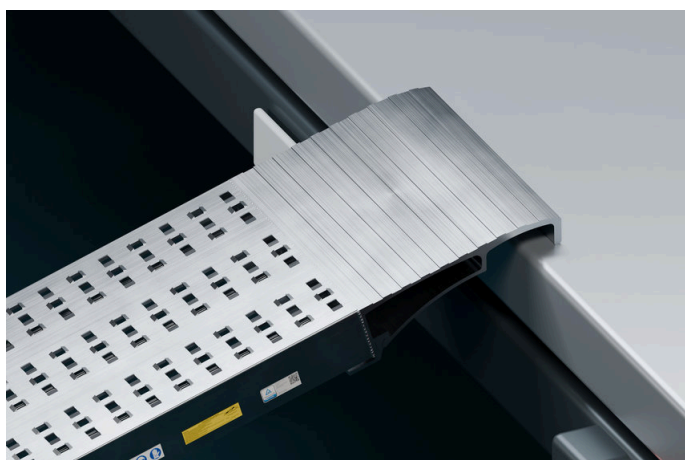

H50



Side view

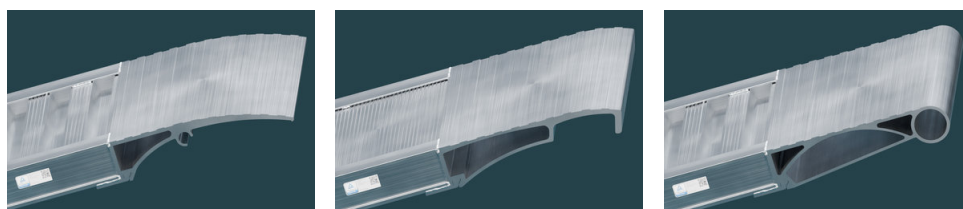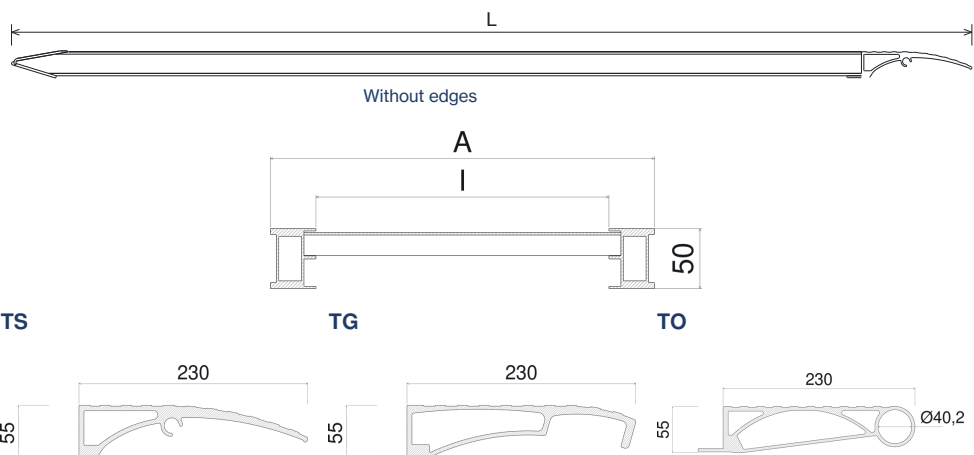

Ramps in position - Standard, Van and H20



Rung Van



Rung Standard



Rung H20

Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1000 - 3500 mm

Weight per pair

13 - 44 kg

Securing devices



Versatile ramps for medium loads. Robust construction for pallet trucks and small forklifts.

This range is designed for users who need a slim, lightweight yet robust ramp. Ideal for gardening and earthmoving, it is also versatile enough for many other sectors. Also available with a finely ribbed anti-slip surface and a hook end.


Code	Head	Wheelbase 750 mm kg	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
H 50/10S	TG, TO, TS	2300 kg	2300 kg	2300 kg	1000	320	244		13	253.05
H 50/15S	TG, TO, TS	2300 kg	2300 kg	2300 kg	1500	320	244		18	340.20
H 50/20S	TG, TO, TS	1530 kg	1810 kg	2000 kg	2000	320	244		23	447.30
H 50/25S	TG, TO, TS	1090 kg	1250 kg	1550 kg	2500	320	244		28	529.20
H 50/30S	TG, TO, TS	850 kg	940 kg	1050 kg	3000	320	244		34	642.60
H 50/35S	TG, TO, TS	690 kg	750 kg	850 kg	3500	320	244		39	737.10
H 50/10SL	TG, TO, TS	2000 kg	2000 kg	2000 kg	1000	400	324		15	291.90
H 50/15SL	TG, TO, TS	2000 kg	2000 kg	2000 kg	1500	400	324		21	396.90
H 50/20SL	TG, TO, TS	1530 kg	1600 kg	1600 kg	2000	400	324		27	525.00
H 50/25SL	TG, TO, TS	1090 kg	1250 kg	1500 kg	2500	400	324		33	623.70
H 50/30SL	TG, TO, TS	850 kg	940 kg	1050 kg	3000	400	324		39	737.10
H 50/35SL	TG, TO, TS	690 kg	750 kg	850 kg	3500	400	324		44	831.60

The table values refer to a pair of ramps.

Lower end detail - Standard





Lower end detail - Van

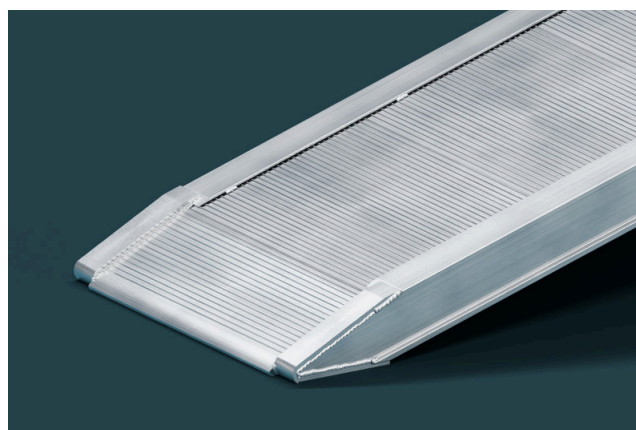


H65



Side view

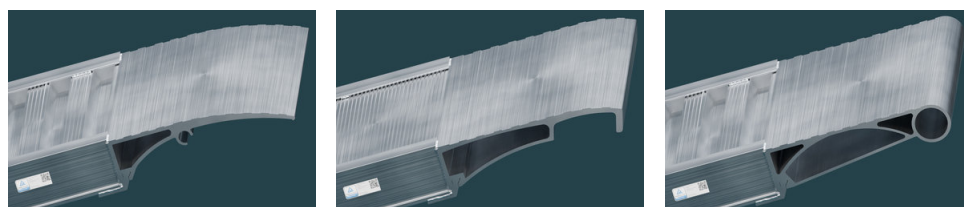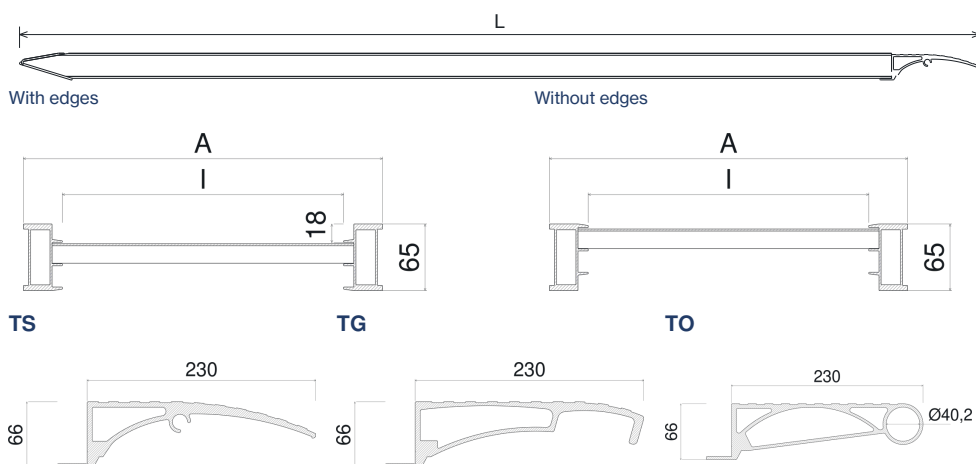

Ramps in position - Standard, Van and H20



Rung Van



Rung Standard



Rung H20

Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1000 - 3500 mm

Weight per pair

14 - 46 kg

Securing devices



Professional ramps for intensive use. Ideal for logistics and warehouses.

The H65 range is particularly suitable for earthmoving, gardening, trailers and vehicles. It combines low weight with high load capacity. Also available with a finely ribbed anti-slip surface and a hook end. Supplied with or without safety side edges.


	Code	Head	Wheelbase 750 mm kg	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €	
Without edges	Narrow	H 65/10S	TG, TO, TS	2500 kg	2500 kg	2500 kg	1000	350	274	-	14	279.30
		H 65/15S	TG, TO, TS	2500 kg	2500 kg	2500 kg	1500	350	274	-	20	367.50
		H 65/20S	TG, TO, TS	2000 kg	2000 kg	2000 kg	2000	350	274	-	25	472.50
		H 65/25S	TG, TO, TS	1700 kg	1900 kg	2000 kg	2500	350	274	-	31	570.15
		H 65/30S	TG, TO, TS	1400 kg	1700 kg	1900 kg	3000	350	274	-	37	680.40
		H 65/35S	TG, TO, TS	1150 kg	1250 kg	1400 kg	3500	350	274	-	42	771.75
	Wide	H 65/10SL	TG, TO, TS	2500 kg	2500 kg	2500 kg	1000	400	324	-	16	319.20
		H 65/15SL	TG, TO, TS	2500 kg	2500 kg	2500 kg	1500	400	324	-	22	404.25
		H 65/20SL	TG, TO, TS	2000 kg	2000 kg	2000 kg	2000	400	324	-	28	529.20
		H 65/25SL	TG, TO, TS	1700 kg	1900 kg	2000 kg	2500	400	324	-	34	624.75
		H 65/30SL	TG, TO, TS	1400 kg	1700 kg	1900 kg	3000	400	324	-	40	735.00
		H 65/35SL	TG, TO, TS	1150 kg	1250 kg	1400 kg	3500	400	324	-	46	845.25
With edges	Narrow	H 65/10B	TG, TO, TS	2500 kg	2500 kg	2500 kg	1000	350	274	18	14	279.30
		H 65/15B	TG, TO, TS	2500 kg	2500 kg	2500 kg	1500	350	274	18	20	367.50
		H 65/20B	TG, TO, TS	2000 kg	2000 kg	2000 kg	2000	350	274	18	25	472.50
		H 65/25B	TG, TO, TS	1700 kg	1900 kg	2000 kg	2500	350	274	18	31	570.15
		H 65/30B	TG, TO, TS	1400 kg	1700 kg	1900 kg	3000	350	274	18	37	680.40
		H 65/35B	TG, TO, TS	1150 kg	1250 kg	1400 kg	3500	350	274	18	42	771.75
	Wide	H 65/10BL	TG, TO, TS	2500 kg	2500 kg	2500 kg	1000	400	324	18	14	279.30
		H 65/15BL	TG, TO, TS	2500 kg	2500 kg	2500 kg	1500	400	324	18	22	404.25
		H 65/20BL	TG, TO, TS	2000 kg	2000 kg	2000 kg	2000	400	324	18	28	529.20
		H 65/25BL	TG, TO, TS	1700 kg	1900 kg	2000 kg	2500	400	324	18	34	624.75
		H 65/30BL	TG, TO, TS	1400 kg	1700 kg	1900 kg	3000	400	324	18	40	735.00
		H 65/35BL	TG, TS, TO	1150 kg	1250 kg	1400 kg	3500	400	324	18	46	845.25

The table values refer to a pair of ramps.

Lower end detail - Standard





Lower end detail - Van

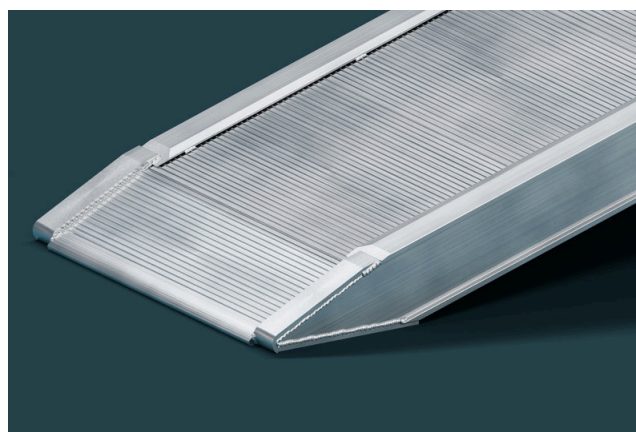



H72



Side view

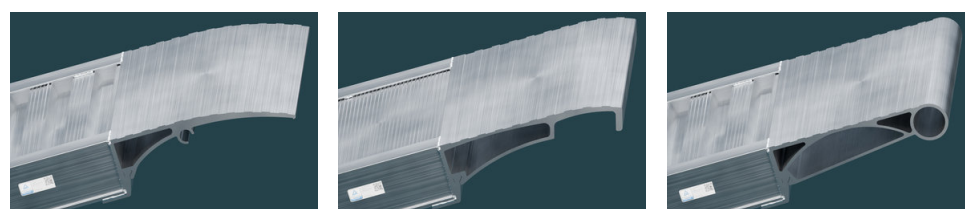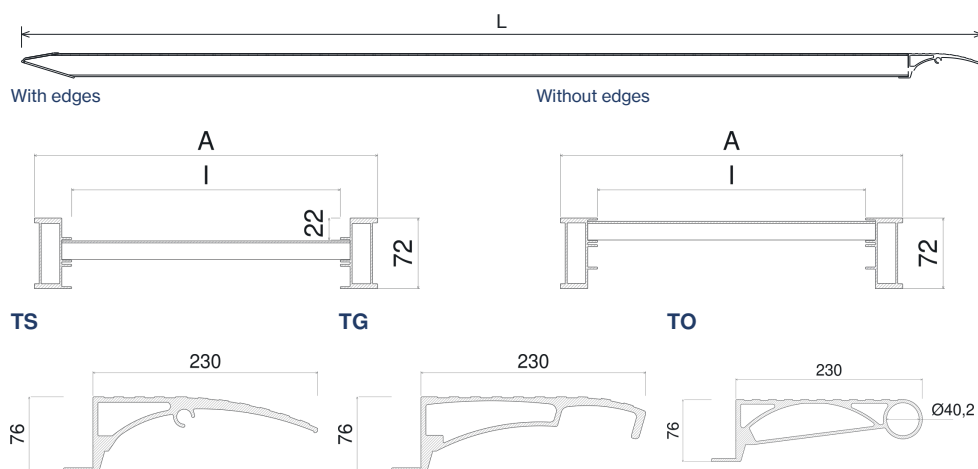


Ramps in position - Standard, Van and H20

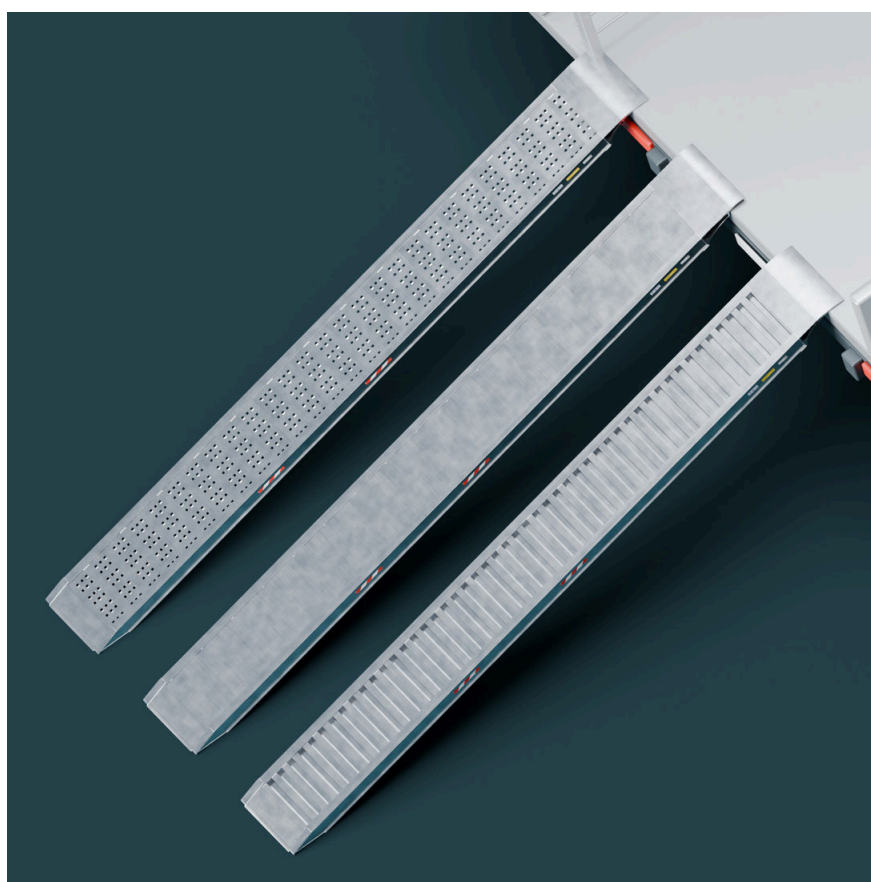

Rung Van



Rung Standard



Rung H20

Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1500 - 3500 mm

Weight per pair

18 - 53 kg

Securing devices



Professional range without side edges. Maximum versatility.

This range was developed mainly for gardening and leisure applications. Available with or without safety edges and with an anti-slip surface specifically designed to meet the needs of these applications.


	Code	Head	Wheelbase 750 mm kg	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
Narrow	H 72/15S	TG, TO, TS	2800 kg	2800 kg	2800 kg	1500	310	234	-	18	359.10
	H 72/20S	TG, TO, TS	1990 kg	2370 kg	2500 kg	2000	310	234	-	24	441.00
	H 72/25S	TS, TG, TO	1410 kg	1610 kg	1850 kg	2500	310	234	-	29	517.65
	H 72/30S	TS, TG, TO	1090 kg	1210 kg	1350 kg	3000	310	234	-	34	624.75
	H 72/35S	TS, TG, TO	890 kg	970 kg	1060 kg	3500	310	234	-	40	705.60
Wide	H 72/15SL	TS, TG, TO	2500 kg	2500 kg	2500 kg	1500	510	434	-	25	525.00
	H 72/20SL	TS, TG, TO	1990 kg	2370 kg	2500 kg	2000	510	434	-	32	621.60
	H 72/25SL	TS, TG, TO	1410 kg	1610 kg	1850 kg	2500	510	434	-	39	778.05
	H 72/30SL	TS, TG, TO	1090 kg	1210 kg	1350 kg	3000	510	434	-	46	917.70
	H 72/35SL	TS, TG, TO	890 kg	970 kg	1060 kg	3500	510	434	-	53	1,030.05
Narrow	H 72/15B	TS, TG, TO	2800 kg	2800 kg	2800 kg	1500	310	234	22	19	379.05
	H 72/20B	TS, TG, TO	1990 kg	2370 kg	2500 kg	2000	310	234	22	24	441.00
	H 72/25B	TS, TG, TO	1410 kg	1610 kg	1850 kg	2500	310	234	22	29	517.65
	H 72/30B	TS, TG, TO	1090 kg	1210 kg	1350 kg	3000	310	234	22	34	624.75
	H 72/35B	TS, TG, TO	890 kg	970 kg	1060 kg	3500	310	234	22	40	705.60
Wide	H 72/15BL	TS, TG, TO	2500 kg	2500 kg	2500 kg	1500	510	434	22	25	525.00
	H 72/20BL	TS, TG, TO	1990 kg	2370 kg	2500 kg	2000	510	434	22	32	621.60
	H 72/25BL	TS, TG, TO	1410 kg	1610 kg	1850 kg	2500	510	434	22	39	778.05
	H 72/30BL	TS, TG, TO	1090 kg	1210 kg	1350 kg	3000	510	434	22	46	917.70
	H 72/35BL	TS, TG, TO	890 kg	970 kg	1060 kg	3500	510	434	22	53	1,030.05

The table values refer to a pair of ramps.

Lower end detail - Standard





Lower end detail - Van

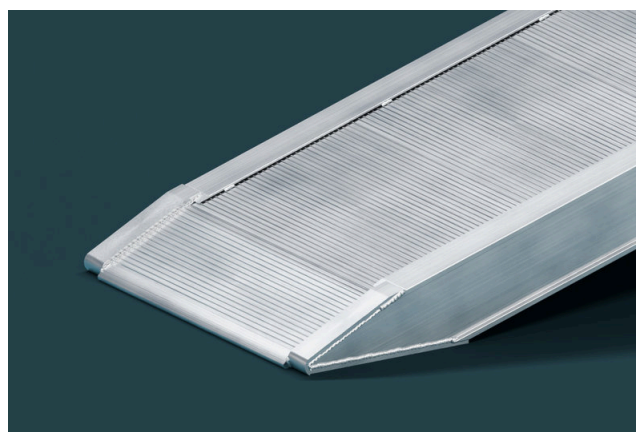



H75



Side view

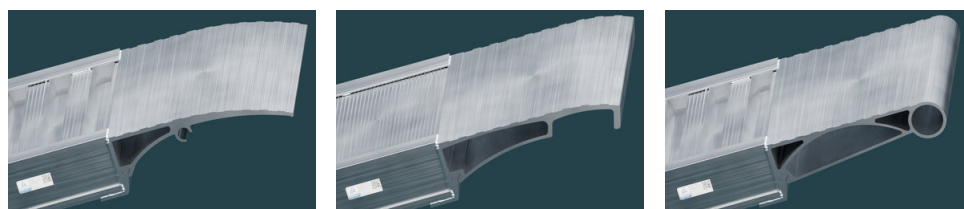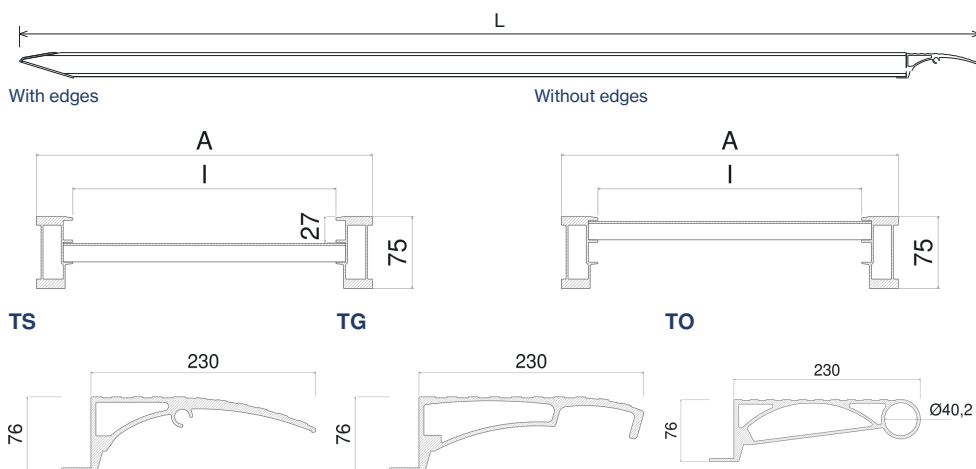


Ramps in position - Standard, Van and H20

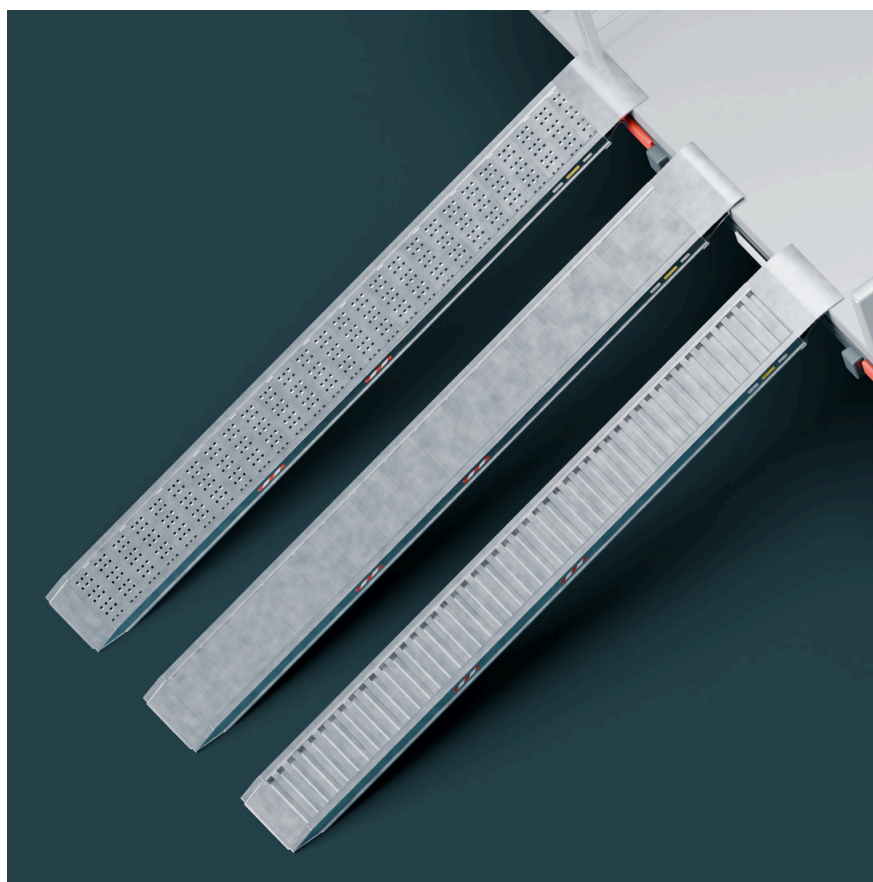

Rung Van



Rung Standard



Rung H20

Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1500 - 4000 mm

Weight per pair

23 - 63 kg

Securing devices



High-capacity ramps for forklifts and heavy vehicles.

The H75 range is particularly suitable for earthmoving, gardening, trailers and vehicles. It combines low weight with high load capacity. Also available with a finely ribbed anti-slip surface and a hook end.

Code	Head	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Wheelbase 1500 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
------	------	----------------------------	----------------------------	----------------------------	--------------	------------------	------------------	------------	--------------	------------

Without edges	Narrow	H 75/15S	TG, TO, TS	3500 kg	3500 kg	3500 kg	1500	340	264	-	23	368.00
		H 75/20S	TG, TO, TS	3500 kg	3500 kg	3500 kg	2000	340	264	-	30	480.00
		H 75/25S	TG, TO, TS	2570 kg	2950 kg	3170 kg	2500	340	264	-	37	574.00
		H 75/30S	TG, TO, TS	1930 kg	2150 kg	2420 kg	3000	340	264	-	44	682.00
		H 75/35S	TG, TO, TS	1550 kg	1690 kg	1860 kg	3500	340	264	-	51	791.00
		H 75/40S	TG, TO, TS	1290 kg	1390 kg	1500 kg	4000	340	264	-	58	899.00
	Wide	H 75/15SL	TG, TO, TS	3500 kg	3500 kg	3500 kg	1500	400	324	-	26	416.00
		H 75/20SL	TG, TO, TS	3500 kg	3500 kg	3500 kg	2000	400	324	-	33	528.00
		H 75/25SL	TG, TO, TS	2570 kg	2950 kg	3170 kg	2500	400	324	-	40	620.00
		H 75/30SL	TG, TO, TS	1930 kg	2150 kg	2420 kg	3000	400	324	-	48	744.00
		H 75/35SL	TG, TO, TS	1550 kg	1690 kg	1860 kg	3500	400	324	-	55	853.00
		H 75/40SL	TG, TO, TS	1290 kg	1390 kg	1500 kg	4000	400	324	-	63	977.00


With edges	Narrow	H 75/15B	TG, TO, TS	3500 kg	3500 kg	3500 kg	1500	340	264	27	23	368.00
		H 75/20B	TG, TO, TS	3500 kg	3500 kg	3500 kg	2000	340	264	27	30	480.00
		H 75/25B	TG, TO, TS	2570 kg	2950 kg	3170 kg	2500	340	264	27	37	574.00
		H 75/30B	TG, TO, TS	1930 kg	2150 kg	2420 kg	3000	340	264	27	44	682.00
		H 75/35B	TG, TO, TS	1550 kg	1690 kg	1860 kg	3500	340	264	27	51	791.00
		H 75/40B	TG, TO, TS	1290 kg	1390 kg	1500 kg	4000	340	264	27	58	899.00
	Wide	H 75/15BL	TG, TO, TS	3500 kg	3500 kg	3500 kg	1500	400	324	27	26	416.00
		H 75/20BL	TG, TO, TS	3500 kg	3500 kg	3500 kg	2000	400	324	27	33	528.00
		H 75/25BL	TG, TO, TS	2570 kg	2950 kg	3170 kg	2500	400	324	27	40	620.00
		H 75/30BL	TG, TO, TS	1930 kg	2150 kg	2420 kg	3000	400	324	27	48	744.00
		H 75/35BL	TG, TO, TS	1550 kg	1690 kg	1860 kg	3500	400	324	27	58	899.00
		H 75/40BL	TG, TO, TS	1290 kg	1390 kg	1500 kg	4000	400	324	27	63	977.00

The table values refer to a pair of ramps.

Lower end detail - Standard





Lower end detail - Van

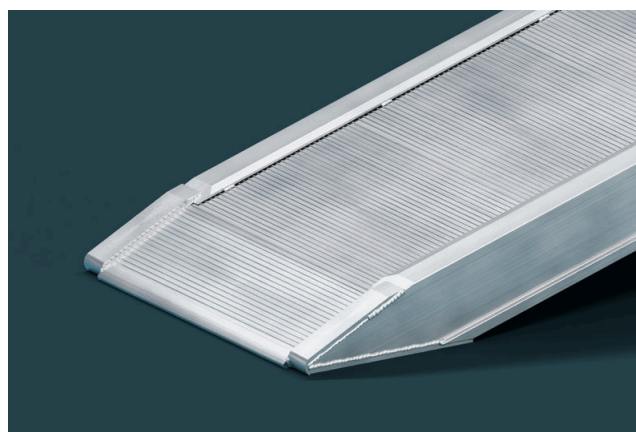



H85



Side view

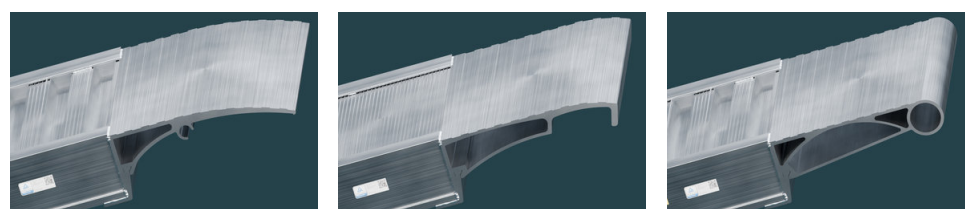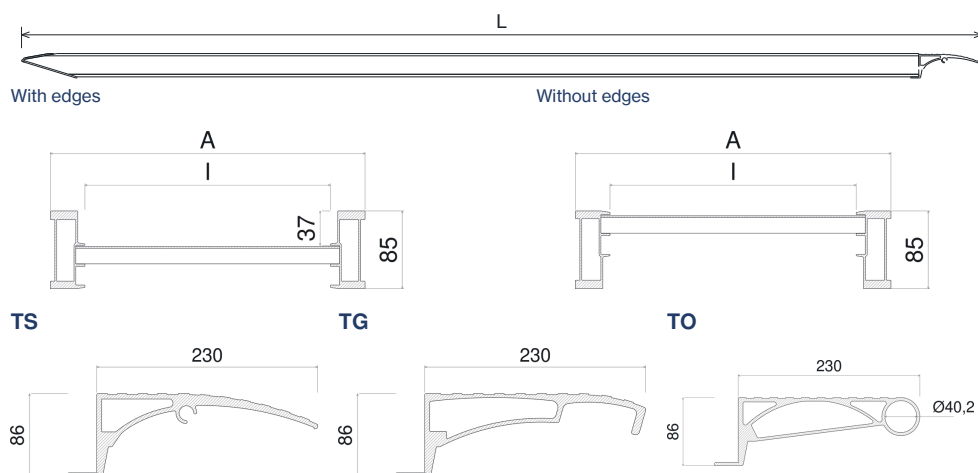


Ramps in position - Standard, Van and H20

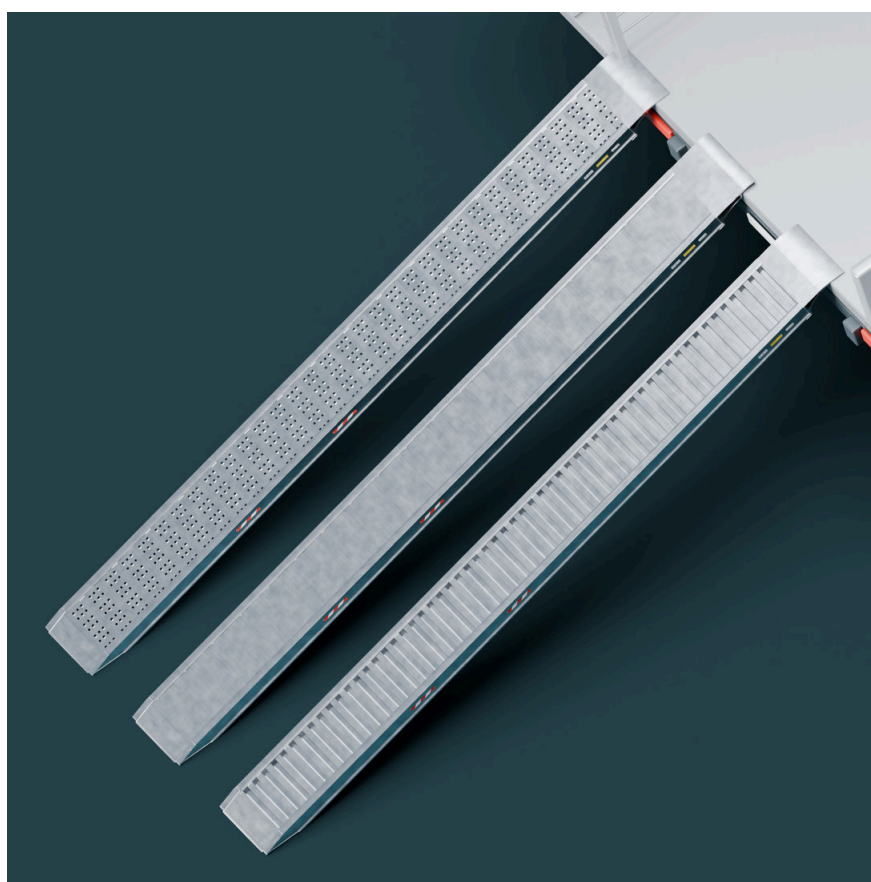

Rung Van



Rung Standard



Rung H20

Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1500 - 4000 mm

Weight per pair

24 - 63 kg

Securing devices



Heavy-duty ramps for demanding industrial applications.

The H85 range is suitable for earthmoving and gardening and is widely used for trailers and vehicles. It combines low weight with high load capacity.

Also available with a finely ribbed anti-slip surface and hook or tube ends.


	Code	Head	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Wheelbase 1500 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €	
Without edges	Narrow	H 85/15S	TG, TO, TS	4000 kg	4000 kg	4000 kg	1500	345	269	-	24	428.40
		H 85/20S	TG, TO, TS	4000 kg	4000 kg	4000 kg	2000	345	269	-	31	553.35
		H 85/25S	TG, TO, TS	2970 kg	3420 kg	3650 kg	2500	345	269	-	38	678.30
		H 85/30S	TG, TO, TS	2230 kg	2490 kg	2790 kg	3000	345	269	-	45	780.15
		H 85/35S	TG, TO, TS	1780 kg	1950 kg	2140 kg	3500	345	269	-	52	873.60
		H 85/40S	TG, TO, TS	1480 kg	1600 kg	1730 kg	4000	345	269	-	59	991.20
	Wide	H 85/15SL	TG, TO, TS	4000 kg	4000 kg	4000 kg	1500	400	324	-	26	464.10
		H 85/20SL	TG, TO, TS	4000 kg	4000 kg	4000 kg	2000	400	324	-	33	589.05
		H 85/25SL	TG, TO, TS	2970 kg	3420 kg	3650 kg	2500	400	324	-	41	731.85
		H 85/30SL	TG, TO, TS	2230 kg	2490 kg	2790 kg	3000	400	324	-	48	831.60
		H 85/35SL	TG, TO, TS	1780 kg	1950 kg	2140 kg	3500	400	324	-	56	940.80
		H 85/40SL	TG, TO, TS	1480 kg	1600 kg	1730 kg	4000	400	324	-	63	1,058.40
With edges	Narrow	H 85/15B	TG, TO, TS	4000 kg	4000 kg	4000 kg	1500	345	269	37	24	428.40
		H 85/20B	TG, TO, TS	4000 kg	4000 kg	4000 kg	2000	345	269	37	31	553.35
		H 85/25B	TG, TO, TS	2970 kg	3420 kg	3650 kg	2500	345	269	37	38	678.30
		H 85/30B	TG, TO, TS	2230 kg	2490 kg	2790 kg	3000	345	269	37	45	780.15
		H 85/35B	TG, TO, TS	1780 kg	1950 kg	2140 kg	3500	345	269	37	52	873.60
		H 85/40B	TG, TO, TS	1480 kg	1600 kg	1730 kg	4000	345	269	37	59	991.20
	Wide	H 85/15BL	TG, TO, TS	4000 kg	4000 kg	4000 kg	1500	400	324	37	26	464.10
		H 85/20BL	TG, TO, TS	4000 kg	4000 kg	4000 kg	2000	400	324	37	33	589.05
		H 85/25BL	TG, TO, TS	2970 kg	3420 kg	3650 kg	2500	400	324	37	41	731.85
		H 85/30BL	TG, TO, TS	2230 kg	2490 kg	2790 kg	3000	400	324	37	48	831.60
		H 85/35BL	TG, TO, TS	1780 kg	1950 kg	2140 kg	3500	400	324	37	56	940.80
		H 85/40BL	TG, TO, TS	1480 kg	1600 kg	1730 kg	4000	400	324	37	63	1,058.40

The table values refer to a pair of ramps.

Lower end detail - Standard



Lower end detail - Van

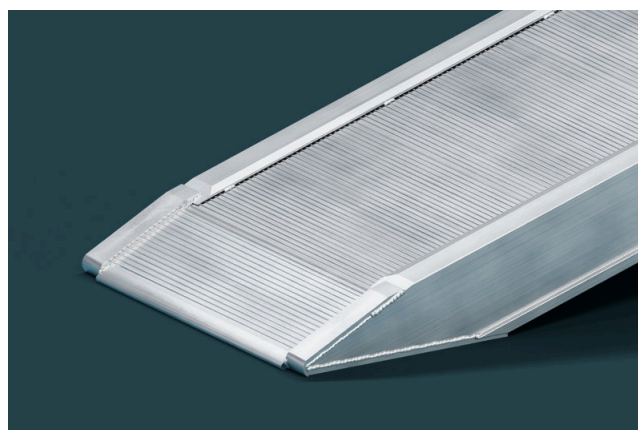

H100



Side view



Categories

Earthmoving

Gardening



Logistics

Trailers

Accessibility

Motorcycles

Container

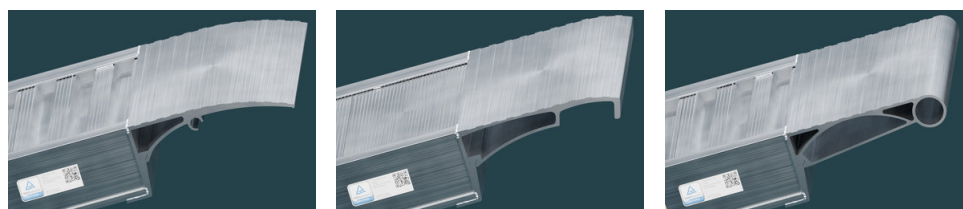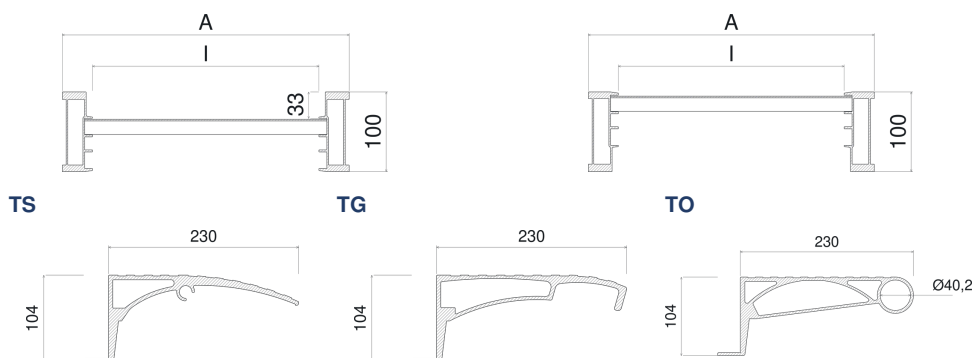

Ramps in position - Standard, Van and H20

Dimensions



Length

1500 - 4000 mm

Weight per pair

24 - 68 kg


Securing devices

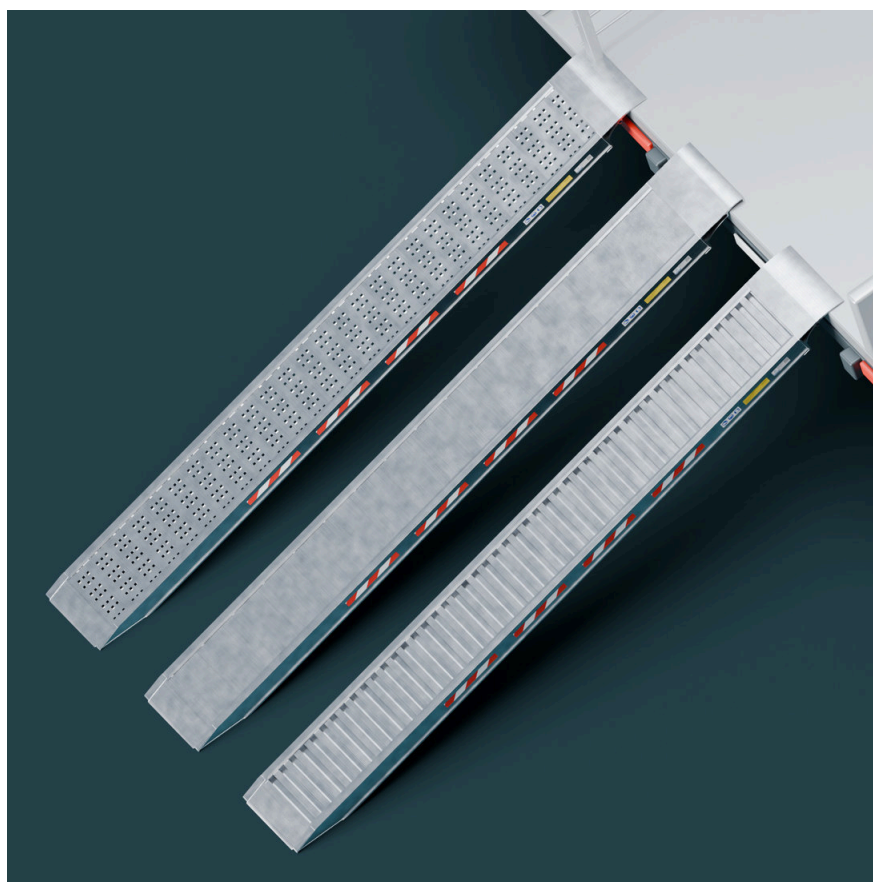

Rung Van



Rung Standard



Rung H20

Heavy-duty ramps with a reinforced structure.

The H100 range is versatile, very robust and compact. It is suitable for earthmoving and gardening and is widely used for trailers and vehicles.

It combines low weight with high load capacity. Supplied with or without safety edges.

Also available with a finely ribbed anti-slip surface and hook or tube ends.

Code	Head	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Wheelbase 1500 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
------	------	----------------------------	----------------------------	----------------------------	--------------	------------------	------------------	------------	--------------	------------

Without edges	Narrow	H 100/15S	TG, TO, TS	4500 kg	4500 kg	4500 kg	1500	360	284	-	26	450.45
		H 100/20S	TG, TO, TS	4500 kg	4500 kg	4500 kg	2000	360	284	-	33	572.25
		H 100/25S	TG, TO, TS	3800 kg	4000 kg	4000 kg	2500	360	284	-	41	688.80
		H 100/30S	TG, TO, TS	2850 kg	3180 kg	3570 kg	3000	360	284	-	49	823.20
		H 100/35S	TG, TO, TS	2270 kg	2490 kg	2730 kg	3500	360	284	-	56	940.80
		H 100/40S	TG, TO, TS	1890 kg	2040 kg	2210 kg	4000	360	284	-	64	1,075.20
	Wide	H 100/15SL	TG, TO, TS	4500 kg	4500 kg	4500 kg	1500	410	334	-	28	485.10
		H 100/20SL	TG, TO, TS	4500 kg	4500 kg	4500 kg	2000	410	334	-	36	623.70
		H 100/25SL	TG, TO, TS	3800 kg	4000 kg	4000 kg	2500	410	334	-	44	739.20
		H 100/30SL	TG, TO, TS	2850 kg	3180 kg	3570 kg	3000	410	334	-	52	873.60
		H 100/35SL	TG, TO, TS	2270 kg	2490 kg	2730 kg	3500	410	334	-	60	1,008.00
		H 100/40SL	TG, TO, TS	1890 kg	2040 kg	2210 kg	4000	410	334	-	68	1,142.40

With edges	Narrow	H 100/15B	TG, TO, TS	4500 kg	4500 kg	4500 kg	1500	360	284	33	26	450.45
		H 100/20B	TG, TO, TS	4500 kg	4500 kg	4500 kg	2000	360	284	33	33	572.25
		H 100/25B	TG, TO, TS	3800 kg	4000 kg	4000 kg	2500	360	284	33	41	688.80
		H 100/30B	TG, TO, TS	2850 kg	3180 kg	3570 kg	3000	360	284	33	49	823.20
		H 100/35B	TG, TO, TS	2270 kg	2490 kg	2730 kg	3500	360	284	33	56	940.80
		H 100/40B	TG, TO, TS	1890 kg	2040 kg	2210 kg	4000	360	284	33	64	1,075.20
	Wide	H 100/15BL	TG, TO, TS	4500 kg	4500 kg	4500 kg	1500	410	334	33	28	485.10
		H 100/20BL	TG, TO, TS	4500 kg	4500 kg	4500 kg	2000	410	334	33	36	623.70
		H 100/25BL	TG, TO, TS	3800 kg	4000 kg	4000 kg	2500	410	334	33	44	739.20
		H 100/30BL	TG, TO, TS	2850 kg	3180 kg	3570 kg	3000	410	334	33	52	873.60
		H 100/35BL	TG, TO, TS	2270 kg	2490 kg	2730 kg	3500	410	334	33	60	1,008.00
		H 100/40BL	TG, TO, TS	1890 kg	2040 kg	2210 kg	4000	410	334	33	68	1,142.40

The table values refer to a pair of ramps.

Lower end detail - Standard





Lower end detail - Van





H110




Side view

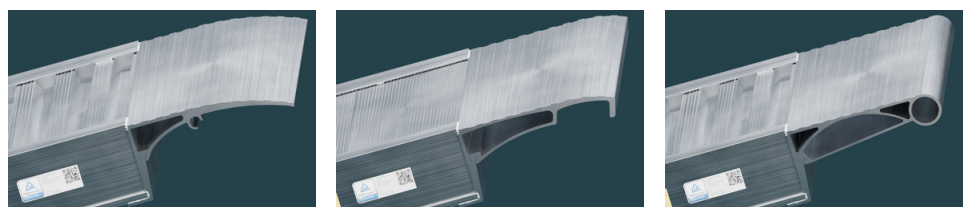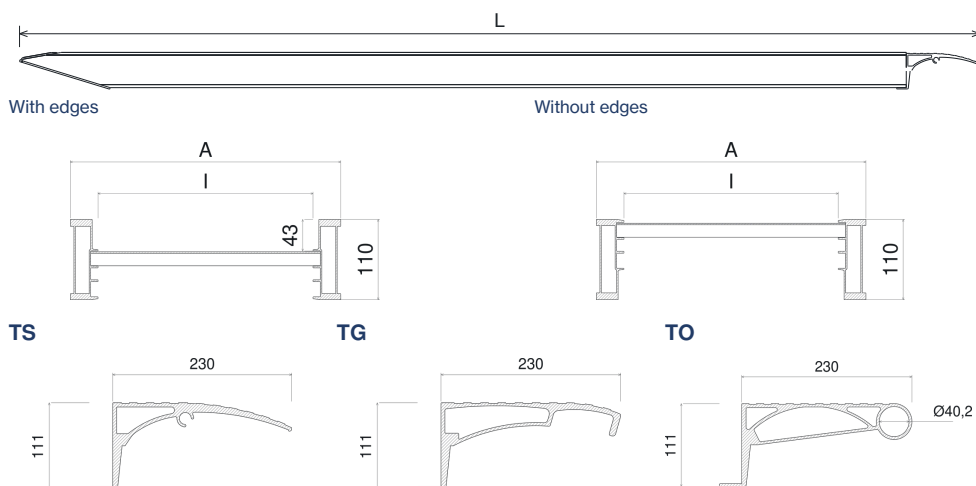


Ramps in position - Standard, Van and H20

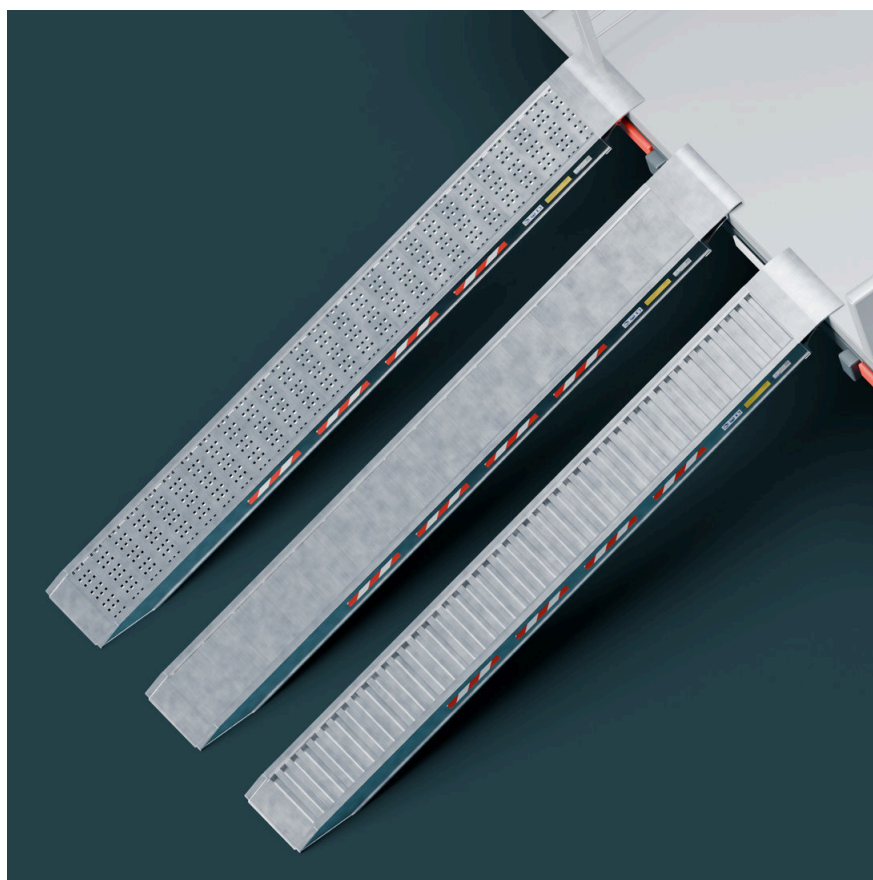

Rung Van



Rung Standard



Rung H20

Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1500 - 4000 mm

Weight per pair

27 - 70 kg

Securing devices



High load capacity for large forklifts.

The H110 range is versatile, very robust and compact. It is suitable for earthmoving, gardening, trailers and vehicles. It combines low weight with high load capacity. Supplied with or without safety edges. Also available with a finely ribbed anti-slip surface and hook or tube ends.

	Code	Head	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Wheelbase 1500 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €	
Without edges	Narrow	H 110/15S	TG, TO, TS	5000 kg	5000 kg	5000 kg	1500	370	294	-	27	481.95
		H 110/20S	TG, TO, TS	4500 kg	4500 kg	4500 kg	2000	370	294	-	35	624.75
		H 110/25S	TG, TO, TS	4000 kg	4000 kg	4000 kg	2500	370	294	-	43	767.55
		H 110/30S	TG, TO, TS	3310 kg	3700 kg	3810 kg	3000	370	294	-	50	892.50
		H 110/35S	TG, TO, TS	2700 kg	3000 kg	3280 kg	2500	370	294	-	58	1,004.85
		H 110/40S	TG, TO, TS	2330 kg	2500 kg	2700 kg	4000	370	294	-	66	1,108.80
	Wide	H 110/15SL	TG, TO, TS	5000 kg	5000 kg	5000 kg	1500	420	344	-	29	517.65
		H 110/20SL	TG, TO, TS	4500 kg	4500 kg	4500 kg	2000	420	344	-	37	660.45
		H 110/25SL	TG, TO, TS	4000 kg	4000 kg	4000 kg	2500	420	344	-	45	803.25
		H 110/30SL	TG, TO, TS	3310 kg	3700 kg	3810 kg	3000	420	344	-	54	963.90
		H 110/35SL	TG, TO, TS	2700 kg	3000 kg	3280 kg	3500	420	344	-	62	1,074.15
		H 110/40SL	TG, TO, TS	2330 kg	2500 kg	2700 kg	4000	420	344	-	70	1,176.00
With edges	Narrow	H 110/15B	TG, TO, TS	5000 kg	5000 kg	5000 kg	1500	370	294	43	27	481.95
		H 110/20B	TG, TO, TS	4500 kg	4500 kg	4500 kg	2000	370	294	43	35	624.75
		H 110/25B	TG, TO, TS	4000 kg	4000 kg	4000 kg	2500	370	294	43	43	767.55
		H 110/30B	TG, TO, TS	3310 kg	3700 kg	3810 kg	3000	370	294	43	50	892.50
		H 110/35B	TG, TO, TS	2700 kg	3000 kg	3280 kg	3500	370	294	43	58	1,004.85
		H 110/40B	TG, TO, TS	2330 kg	2500 kg	2700 kg	4000	370	294	43	66	1,108.80
	Wide	H 110/15BL	TG, TO, TS	5000 kg	5000 kg	5000 kg	1500	420	344	43	29	517.65
		H 110/20BL	TG, TO, TS	4500 kg	4500 kg	4500 kg	2000	420	344	43	37	660.45
		H 110/25BL	TG, TO, TS	4000 kg	4000 kg	4000 kg	2500	420	344	43	45	793.80
		H 110/30BL	TG, TO, TS	3310 kg	3700 kg	3810 kg	3000	420	344	43	54	963.90
		H 110/35BL	TG, TO, TS	2700 kg	3000 kg	3280 kg	3500	420	344	43	62	1,074.15
		H 110/40BL	TG, TO, TS	2330 kg	2500 kg	2700 kg	4000	420	344	43	70	1,176.00

The table values refer to a pair of ramps.

Lower end detail - Standard





Lower end detail - Van





H125



Side view

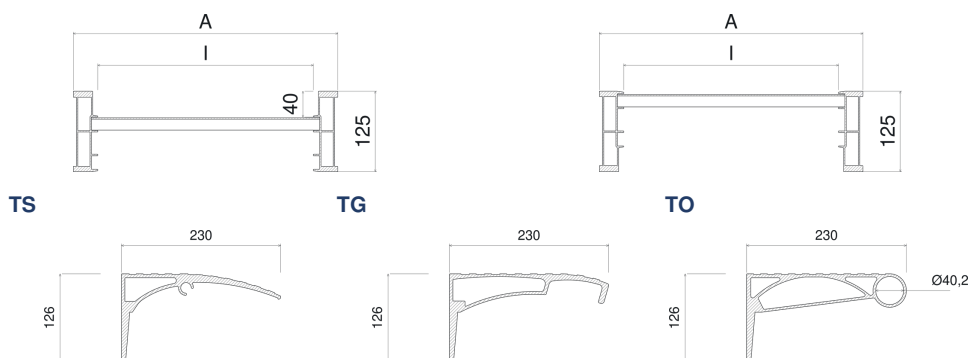

Ramps in position - Standard, Van and H20

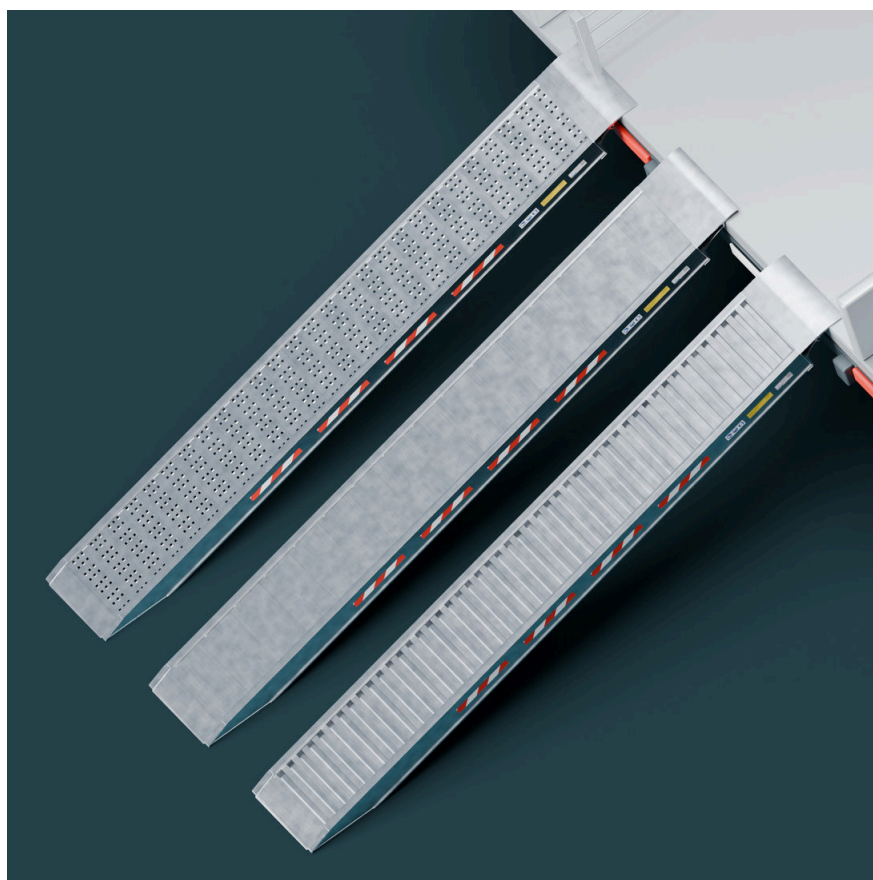

Rung Van



Rung Standard



Rung H20

Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1500 - 4000 mm

Weight per pair

30 - 78 kg

Securing devices



Premium range with increased width for heavy loads.

The H125 range offers high load capacities while retaining compact profiles and dimensions.

Suitable for earthmoving, trailers and vehicles. Supplied with or without safety edges.

Also available with a finely ribbed anti-slip surface and hook or tube ends.

Code	Head	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Wheelbase 1500 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
H 125/15S	TG, TO, TS	5000 kg	5000 kg	5000 kg	1500	410	334	-	30	567.00
H 125/20S	TG, TO, TS	4800 kg	5000 kg	5000 kg	2000	410	334	-	39	737.10
H 125/25S	TG, TO, TS	4390 kg	4740 kg	5000 kg	2500	410	334	-	47	888.30
H 125/30S	TG, TO, TS	3970 kg	4390 kg	4670 kg	3000	410	334	-	56	1,058.40
H 125/35S	TG, TO, TS	3150 kg	3450 kg	3800 kg	3500	410	334	-	65	1,160.25
H 125/40S	TG, TO, TS	2610 kg	2820 kg	3060 kg	4000	410	334	-	74	1,359.75
H 125/15SL	TG, TO, TS	5000 kg	5000 kg	5000 kg	1500	460	384	-	32	604.80
H 125/20SL	TG, TO, TS	4800 kg	5000 kg	5000 kg	2000	460	384	-	41	774.90
H 125/25SL	TG, TO, TS	4390 kg	4740 kg	5000 kg	2500	460	384	-	50	892.50
H 125/30SL	TG, TO, TS	3970 kg	4390 kg	4670 kg	3000	460	384	-	59	1,083.60
H 125/35SL	TG, TO, TS	3150 kg	3450 kg	3800 kg	3500	460	384	-	69	1,216.95
H 125/40SL	TG, TO, TS	2610 kg	2820 kg	3060 kg	4000	460	384	-	78	1,392.30
H 125/15B	TG, TO, TS	5000 kg	5000 kg	5000 kg	1500	410	334	40	30	567.00
H 125/20B	TG, TO, TS	4800 kg	5000 kg	5000 kg	2000	410	334	40	39	737.10
H 125/25B	TG, TO, TS	4390 kg	4740 kg	5000 kg	2500	410	334	40	47	888.30
H 125/30B	TG, TO, TS	3970 kg	4390 kg	4670 kg	3000	410	354	40	56	1,058.40
H 125/35B	TG, TO, TS	3150 kg	3450 kg	3800 kg	3500	410	334	40	65	1,160.25
H 125/40B	TG, TO, TS	2610 kg	2820 kg	3060 kg	4000	410	334	40	74	1,359.75
H 125/15BL	TG, TO, TS	5000 kg	5000 kg	5000 kg	1500	460	384	40	32	604.80
H 125/20BL	TG, TO, TS	4800 kg	5000 kg	5000 kg	2000	460	384	40	41	774.90
H 125/25BL	TG, TO, TS	4390 kg	4740 kg	5000 kg	2500	460	384	40	50	892.50
H 125/30BL	TG, TO, TS	3970 kg	4390 kg	4670 kg	3000	460	384	40	59	1,083.60
H 125/35BL	TG, TO, TS	3150 kg	3450 kg	3800 kg	3500	460	384	40	69	1,216.95
H 125/40BL	TG, TO, TS	2610 kg	2820 kg	3060 kg	4000	460	384	40	78	1,392.30

The table values refer to a pair of ramps.

Lower end detail - Standard




Lower end detail - Van



H135



Side view

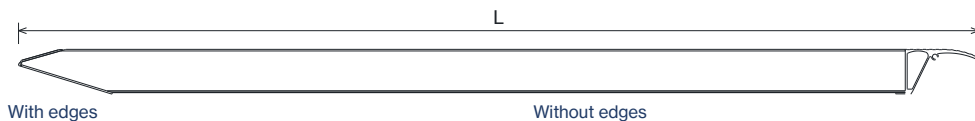

Categories

Earthmoving

Gardening



Logistics

Trailers

Accessibility

Motorcycles

Container

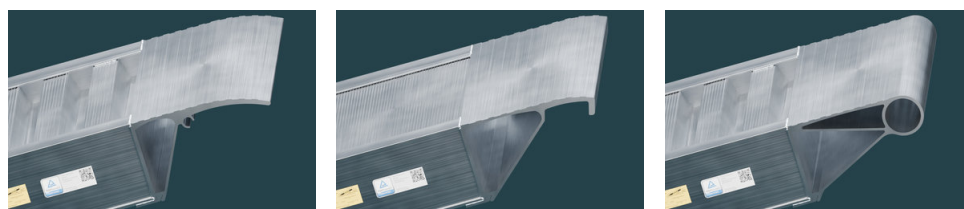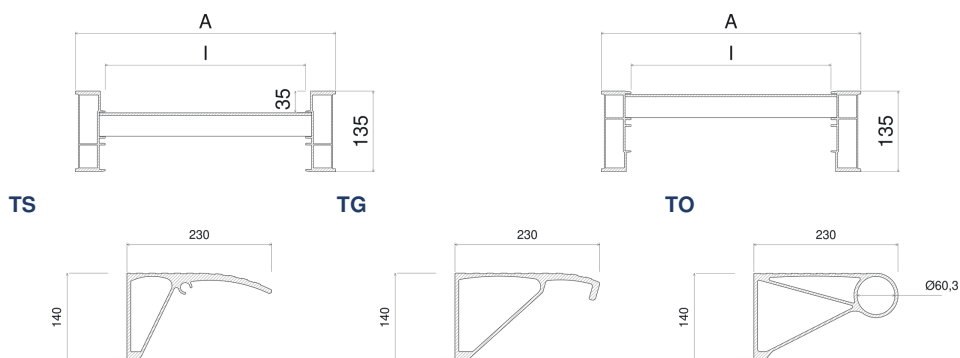

Ramps in position - Standard, Van and H40

Dimensions



Length

2000 - 5000 mm

Weight per pair

53 - 132 kg

Securing devices

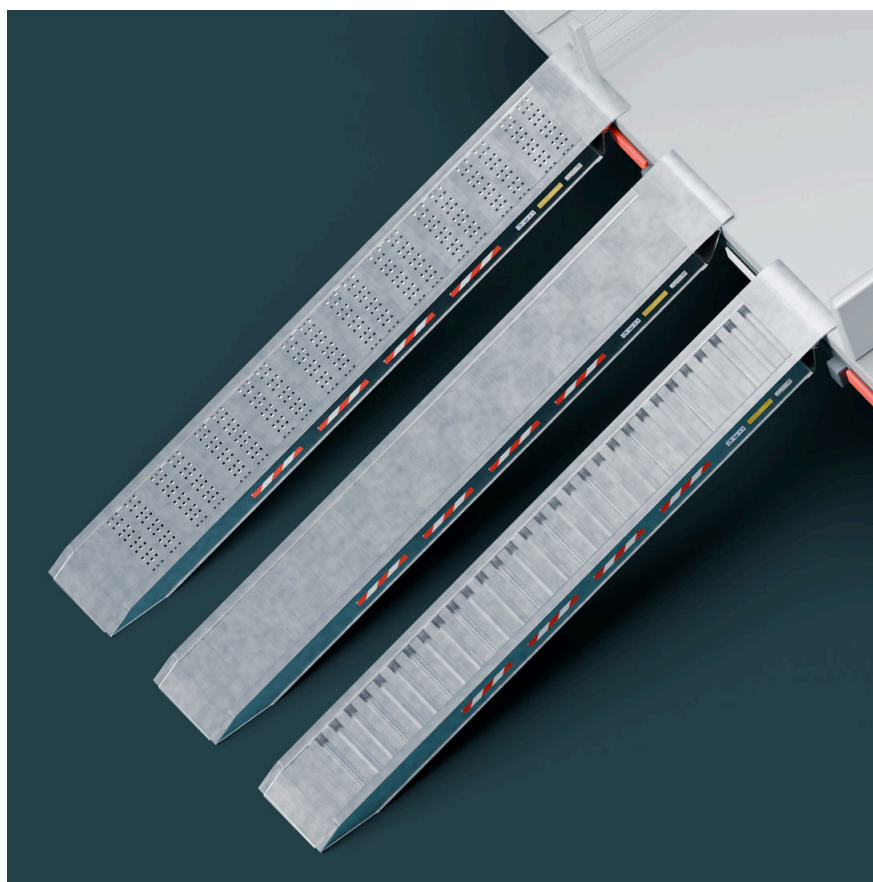

Rung Van



Rung Standard



Rung H40

Extra-wide ramps for heavy industrial applications.

The H135 range offers capacities of up to 7,680 kg per pair, depending on length and wheelbase.


Suitable for loading agricultural and earthmoving vehicles and equipment.

Available with or without safety edges and with standard, hook or tube ends.


Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
H 135/20S	TG, TO, TS	7680 kg	7680 kg	7680 kg	2000	435	335	-	53	890.40
H 135/25S	TG, TO, TS	7680 kg	7680 kg	7680 kg	2500	435	335	-	65	1,092.00
H 135/30S	TG, TO, TS	5940 kg	6330 kg	6330 kg	3000	435	335	-	77	1,212.75
H 135/35S	TG, TO, TS	4540 kg	5010 kg	5380 kg	3500	435	335	-	88	1,386.00
H 135/40S	TG, TO, TS	3650 kg	3970 kg	4330 kg	4000	435	335	-	100	1,522.50
H 135/45S	TG, TO, TS	3050 kg	3280 kg	3530 kg	4500	435	335	-	112	1,705.20
H 135/50S	TG, TO, TS	2620 kg	2790 kg	2970 kg	5000	435	335	-	124	1,887.90
H 135/20SL	TG, TO, TS	7680 kg	7680 kg	7680 kg	2000	485	385	-	57	957.60
H 135/25SL	TG, TO, TS	7680 kg	7680 kg	7680 kg	2500	485	385	-	69	1,159.20
H 135/30SL	TG, TO, TS	5940 kg	6330 kg	6330 kg	3000	485	385	-	82	1,291.50
H 135/35SL	TG, TO, TS	4540 kg	5010 kg	5380 kg	3500	485	385	-	94	1,480.50
H 135/40SL	TG, TO, TS	3650 kg	3970 kg	4330 kg	4000	485	385	-	107	1,628.55
H 135/45SL	TG, TO, TS	3050 kg	3280 kg	3530 kg	4500	485	385	-	119	1,811.25
H 135/50SL	TG, TO, TS	2620 kg	2790 kg	2970 kg	5000	485	385	-	132	2,009.70
H 135/20B	TG, TO, TS	7680 kg	7680 kg	7680 kg	2000	435	335	35	53	890.40
H 135/25B	TG, TO, TS	7680 kg	7680 kg	7680 kg	2500	435	335	35	65	1,092.00
H 135/30B	TG, TO, TS	5940 kg	6330 kg	6330 kg	3000	435	335	35	77	1,212.75
H 135/35B	TG, TO, TS	4540 kg	5010 kg	5380 kg	3500	435	335	35	88	1,386.00
H 135/40B	TG, TO, TS	3650 kg	3970 kg	4330 kg	4000	435	335	35	100	1,522.50
H 135/45B	TG, TO, TS	3050 kg	3280 kg	3530 kg	4500	435	335	35	112	1,705.20
H 135/50B	TG, TO, TS	2620 kg	2790 kg	2970 kg	5000	435	335	35	124	1,887.90
H 135/20BL	TG, TO, TS	7680 kg	7680 kg	7680 kg	2000	485	385	35	57	957.60
H 135/25BL	TG, TO, TS	7680 kg	7680 kg	7680 kg	2500	485	385	35	69	1,159.20
H 135/30BL	TG, TO, TS	5940 kg	6330 kg	6330 kg	3000	485	385	35	82	1,291.50
H 135/35BL	TG, TO, TS	4540 kg	5010 kg	5380 kg	3500	485	385	35	94	1,480.50
H 135/40BL	TG, TO, TS	3650 kg	3970 kg	4330 kg	4000	485	385	35	107	1,628.55
H 135/45BL	TG, TO, TS	3050 kg	3280 kg	3530 kg	4500	485	385	35	119	1,811.25
H 135/50BL	TG, TO, TS	2620 kg	2790 kg	2970 kg	5000	485	385	35	132	2,009.70

The table values refer to a pair of ramps.

Lower end detail - Standard

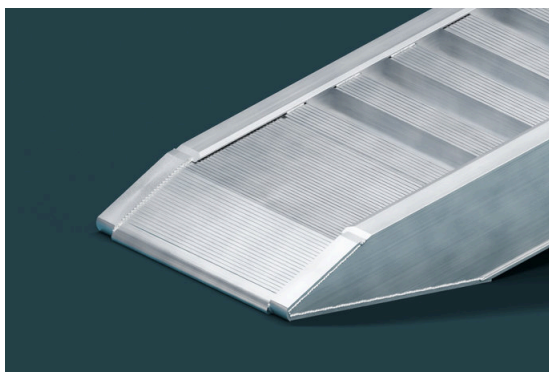


Lower end detail - Van

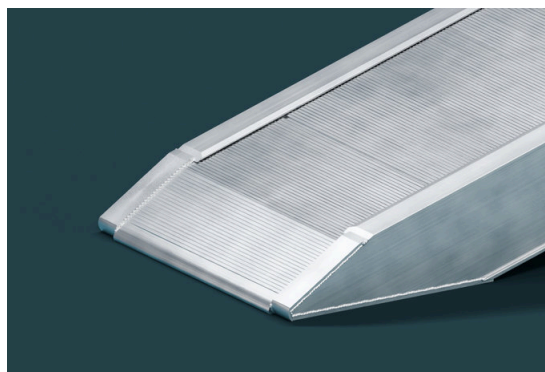

H155





Side view



With edges







Without edges

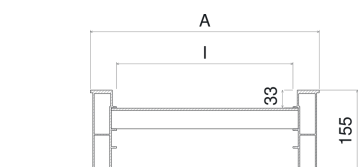


TS

TG

T



Ramps in position - Standard, Van and H40

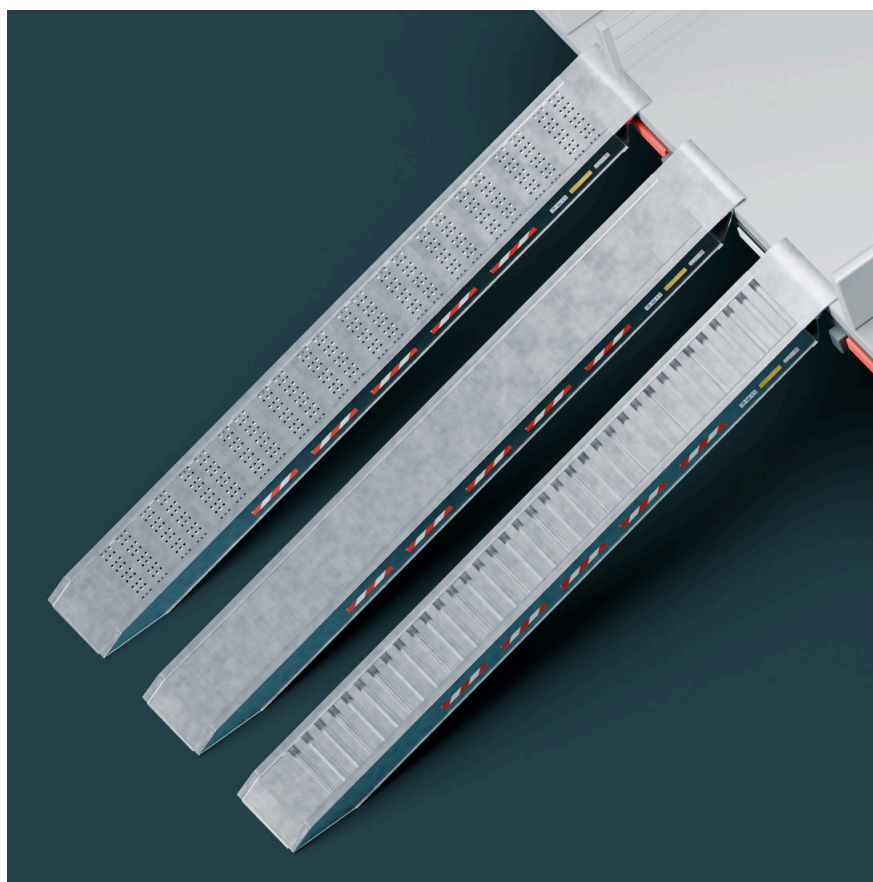

Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions


Length

2000 - 5000 mm

Weight per pair

57 - 149 kg

Securing devices



Rung Van



Rung Standard



Rung H40

Robust ramps for loading heavy vehicles.

The H155 range offers capacities of up to 8,500 kg per pair, depending on length and wheelbase.


Designed for heavy vehicles, it offers a choice of lengths and end configurations.

Available with or without safety edges and with standard, hook or tube ends.


Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
H 155/20S	TG, TO, TS	8500 kg	8500 kg	8500 kg	2000	435	335	-	57	957.60
H 155/25S	TG, TO, TS	8500 kg	8500 kg	8500 kg	2500	435	335	-	69	1,159.20
H 155/30S	TG, TO, TS	7000 kg	7000 kg	7000 kg	3000	435	335	-	82	1,291.50
H 155/35S	TG, TO, TS	5630 kg	6210 kg	6720 kg	3500	435	335	-	95	1,496.25
H 155/40S	TG, TO, TS	4550 kg	4940 kg	5380 kg	4000	435	335	-	108	1,644.30
H 155/45S	TG, TO, TS	3820 kg	4090 kg	4400 kg	4500	435	335	-	121	1,841.70
H 155/50S	TG, TO, TS	3290 kg	3490 kg	3720 kg	5000	435	335	-	133	2,024.40
H 155/20SL	TG, TO, TS	8500 kg	8500 kg	8500 kg	2000	535	435	-	64	1,075.20
H 155/25SL	TG, TO, TS	8500 kg	8500 kg	8500 kg	2500	535	435	-	78	1,310.40
H 155/30SL	TG, TO, TS	7000 kg	7000 kg	7000 kg	3000	535	435	-	92	1,449.00
H 155/35SL	TG, TO, TS	5630 kg	6210 kg	6720 kg	3500	535	435	-	107	1,685.25
H 155/40SL	TG, TO, TS	4550 kg	4940 kg	5380 kg	4000	535	435	-	121	1,841.70
H 155/45SL	TG, TO, TS	3820 kg	4090 kg	4400 kg	4500	535	435	-	135	2,054.85
H 155/50SL	TG, TO, TS	3290 kg	3490 kg	3720 kg	5000	535	435	-	149	2,268.00
H 155/20B	TG, TO, TS	8500 kg	8500 kg	8500 kg	2000	435	335	33	57	957.60
H 155/25B	TG, TO, TS	8500 kg	8500 kg	8500 kg	2500	435	335	33	69	1,159.20
H 155/30B	TG, TO, TS	7000 kg	7000 kg	7000 kg	3000	435	335	33	82	1,291.50
H 155/35B	TG, TO, TS	5630 kg	6210 kg	6720 kg	3500	435	335	33	95	1,496.25
H 155/40B	TG, TO, TS	4550 kg	4940 kg	5380 kg	4000	435	335	33	108	1,644.30
H 155/45B	TG, TO, TS	3820 kg	4090 kg	4400 kg	4500	435	335	33	121	1,841.70
H 155/50B	TG, TO, TS	3290 kg	3490 kg	3720 kg	5000	435	335	33	133	2,024.40
H 155/20BL	TG, TO, TS	8500 kg	8500 kg	8500 kg	2000	535	435	33	64	1,075.20
H 155/25BL	TG, TO, TS	8500 kg	8500 kg	8500 kg	2500	535	435	33	78	1,310.40
H 155/30BL	TG, TO, TS	7000 kg	7000 kg	7000 kg	3000	535	435	33	92	1,449.00
H 155/35BL	TG, TO, TS	5630 kg	6210 kg	6720 kg	3500	535	435	33	107	1,685.25
H 155/40BL	TG, TO, TS	4550 kg	4940 kg	5380 kg	4000	535	435	33	121	1,841.70
H 155/45BL	TG, TO, TS	3820 kg	4090 kg	4400 kg	4500	535	435	33	135	2,054.85
H 155/50BL	TG, TO, TS	3290 kg	3490 kg	3720 kg	5000	535	435	33	149	2,268.00

The table values refer to a pair of ramps.

Lower end detail - Standard

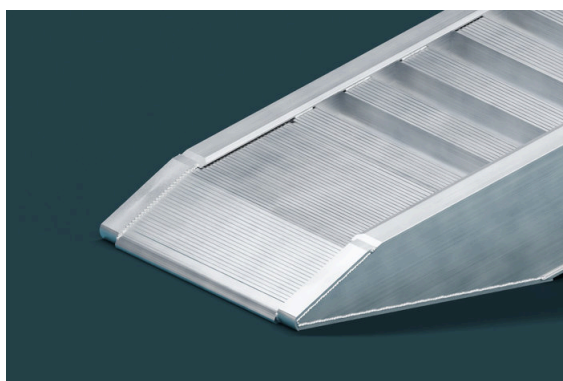


Lower end detail - Van

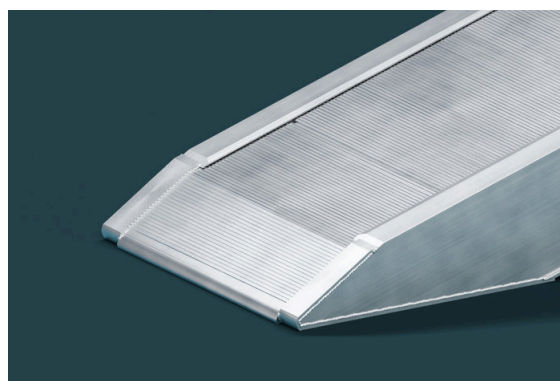

H175





Side view



With edges







Without edges





TS

TG

TO



Ramps in position - Standard, Van and H40

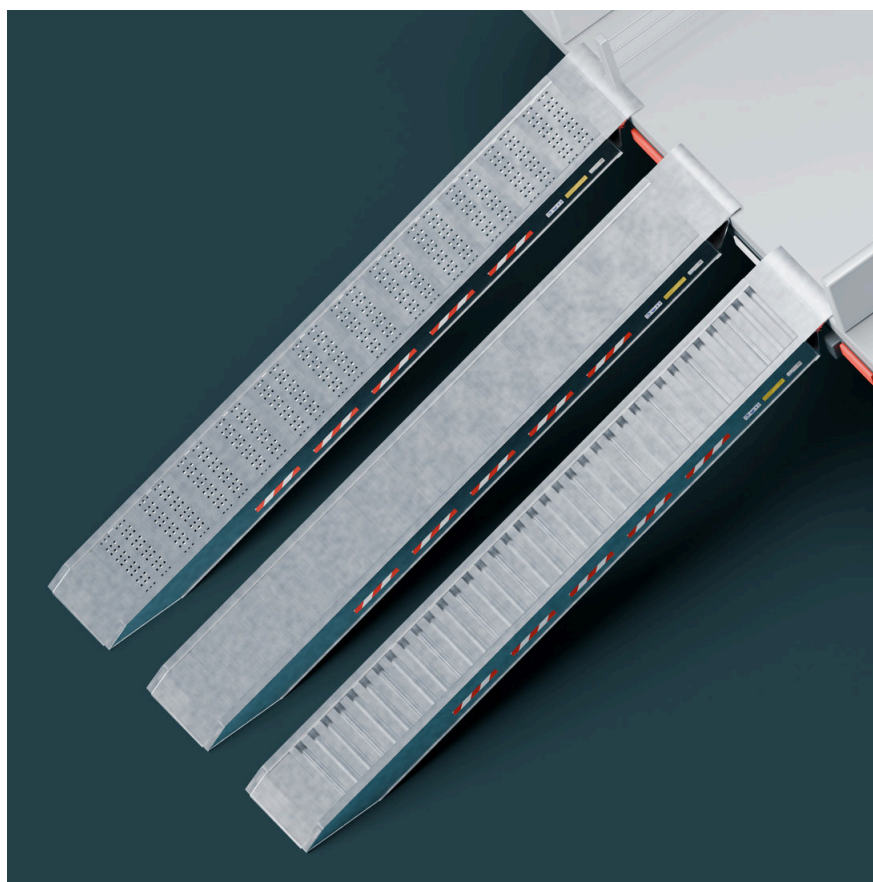

Rung Van



Rung Standard



Rung H40

Categories

 Earthmoving

 Gardening

 Logistics

 Trailers

 Accessibility

 Motorcycles

 Container

Dimensions

Length

2500 - 5000 mm

Weight per pair

78 - 165 kg

Securing devices



Range for very heavy loads and large vehicles.

The H175 range offers capacities of up to 9,000 kg per pair, depending on length and wheelbase.

Suitable for loading heavy agricultural and earthmoving vehicles.

Available with or without safety edges and with standard, hook or tube ends.


	Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €	
Without edges	Narrow	H 175/25S	TG, TO, TS	9000 kg	9000 kg	9000 kg	2500	485	385	-	78	1,310.40
		H 175/30S	TG, TO, TS	9000 kg	9000 kg	9000 kg	3000	485	385	-	92	1,545.60
		H 175/35S	TG, TO, TS	7130 kg	7890 kg	8350 kg	3500	485	385	-	107	1,752.45
		H 175/40S	TG, TO, TS	5710 kg	6220 kg	6800 kg	4000	485	385	-	121	2,007.60
		H 175/45S	TG, TO, TS	4760 kg	5120 kg	5520 kg	4500	485	385	-	135	2,197.65
		H 175/50S	TG, TO, TS	4070 kg	4340 kg	4630 kg	5000	485	385	-	149	2,378.25
	Wide	H 175/25SL	TG, TO, TS	9000 kg	9000 kg	9000 kg	2500	585	485	-	87	1,461.60
		H 175/30SL	TG, TO, TS	9000 kg	9000 kg	9000 kg	3000	585	485	-	103	1,730.40
		H 175/35SL	TG, TO, TS	7130 kg	7890 kg	8350 kg	3500	585	485	-	118	1,933.05
		H 175/40SL	TG, TO, TS	5710 kg	6220 kg	6800 kg	4000	585	485	-	134	2,222.85
		H 175/45SL	TG, TO, TS	4760 kg	5120 kg	5520 kg	4500	585	485	-	149	2,378.25
		H 175/50SL	TG, TO, TS	4070 kg	4340 kg	4630 kg	5000	585	485	-	165	2,633.40
With edges	Narrow	H 175/25B	TG, TO, TS	9000 kg	9000 kg	9000 kg	2500	485	385	40	78	1,461.60
		H 175/30B	TG, TO, TS	9000 kg	9000 kg	9000 kg	3000	485	385	40	92	1,730.40
		H 175/35B	TG, TO, TS	7130 kg	7890 kg	8350 kg	3500	485	385	40	107	1,752.45
		H 175/40B	TG, TO, TS	5710 kg	6220 kg	6800 kg	4000	485	385	40	121	2,007.60
		H 175/45B	TG, TO, TS	4760 kg	5120 kg	5520 kg	4500	485	385	40	135	2,197.65
		H 175/50B	TG, TO, TS	4070 kg	4340 kg	4630 kg	5000	485	385	40	149	2,378.25
	Wide	H 175/25BL	TG, TO, TS	9000 kg	9000 kg	9000 kg	2500	585	485	40	87	1,461.60
		H 175/30BL	TG, TO, TS	9000 kg	9000 kg	9000 kg	3000	585	485	40	103	1,730.40
		H 175/35BL	TG, TO, TS	7130 kg	7890 kg	8350 kg	3500	585	485	40	118	1,933.05
		H 175/40BL	TG, TO, TS	5710 kg	6220 kg	6800 kg	4000	585	485	40	134	2,222.85
		H 175/45BL	TG, TO, TS	4760 kg	5120 kg	5520 kg	4500	585	485	40	149	2,378.25
		H 175/50BL	TG, TO, TS	4070 kg	4340 kg	4630 kg	5000	585	485	40	165	2,633.40

The table values refer to a pair of ramps.

Lower end detail - Standard



Lower end detail - Van

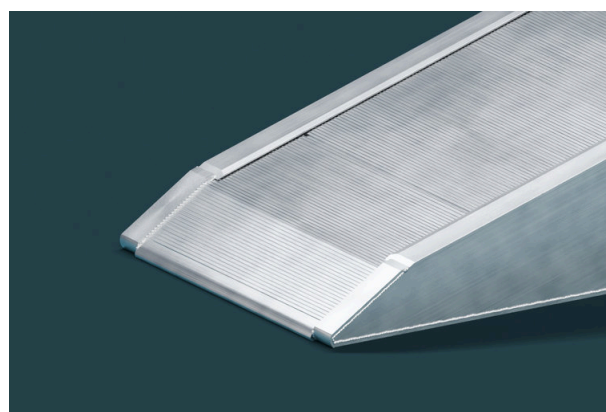

H190



Categories

 Earthmoving

 Gardening

 Logistics

 Trailers

 Accessibility

 Motorcycles

 Container

Dimensions

Length

2500 - 5000 mm


Weight per pair

98 - 197 kg

Securing devices





Side view



With edges







Without edges

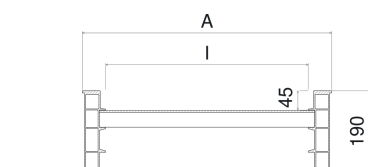


TS

TG

TO

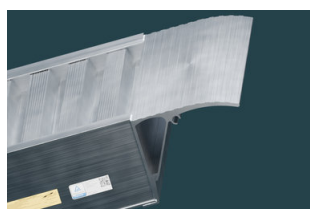

Ramps in position - Standard, Van and H40

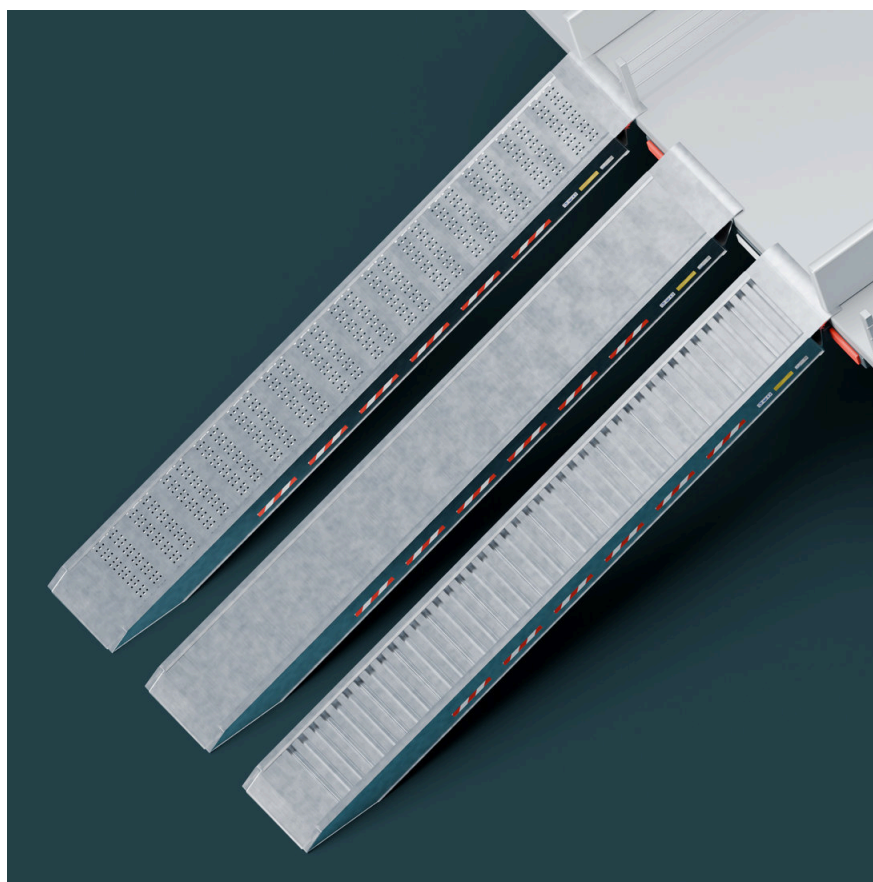

Rung Van



Rung Standard



Rung H40

Ramps for special applications and exceptional loads.

The H190 range offers capacities of up to 11,000 kg per pair, depending on length and wheelbase.

Suitable for loading heavy vehicles and large equipment.

Available with or without safety edges and with standard, hook or tube ends.


	Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €	
Without edges	Narrow	H 190/25S	TG, TO, TS	11.000 kg	11.000 kg	11.000 kg	2500	585	475	-	98	1,646.40
		H 190/30S	TG, TO, TS	11.000 kg	11.000 kg	11.000 kg	3000	585	475	-	116	1,948.80
		H 190/35S	TG, TO, TS	9950 kg	11.000 kg	11.000 kg	3500	585	475	-	134	2,195.55
		H 190/40S	TG, TO, TS	7960 kg	8680 kg	9480 kg	4000	585	475	-	152	2,553.60
		H 190/45S	TG, TO, TS	6620 kg	7130 kg	7690 kg	4500	585	475	-	170	2,766.75
		H 190/50S	TG, TO, TS	5660 kg	6040 kg	6450 kg	5000	585	475	-	188	3,059.70
	Wide	H 190/25SL	TG, TO, TS	11.000 kg	11.000 kg	11.000 kg	2500	635	525	-	103	1,730.40
		H 190/30SL	TG, TO, TS	11.000 kg	11.000 kg	11.000 kg	3000	635	525	-	121	2,032.80
		H 190/35SL	TG, TO, TS	9950 kg	11.000 kg	11.000 kg	3500	635	525	-	140	2,293.20
		H 190/40SL	TG, TO, TS	7960 kg	8680 kg	9480 kg	4000	635	525	-	159	2,671.20
		H 190/45SL	TG, TO, TS	6620 kg	7130 kg	7690 kg	4500	635	525	-	178	2,896.95
		H 190/50SL	TG, TO, TS	5660 kg	6040 kg	6450 kg	5000	635	525	-	197	3,206.70
With edges	Narrow	H 190/25B	TG, TO, TS	11.000 kg	11.000 kg	11.000 kg	2500	585	475	45	98	1,646.40
		H 190/30B	TG, TO, TS	11.000 kg	11.000 kg	11.000 kg	3000	585	475	45	116	1,948.80
		H 190/35B	TG, TO, TS	9950 kg	11.000 kg	11.000 kg	3500	585	475	45	134	2,194.50
		H 190/40B	TG, TO, TS	7960 kg	8680 kg	9480 kg	4000	585	475	45	152	2,553.60
		H 190/45B	TG, TO, TS	6620 kg	7130 kg	7690 kg	4500	585	475	45	170	2,766.75
		H 190/50B	TG, TO, TS	5660 kg	6040 kg	6450 kg	5000	585	475	45	188	3,059.70
	Wide	H 190/25BL	TG, TO, TS	11.000 kg	11.000 kg	11.000 kg	2500	635	525	45	103	1,730.40
		H 190/30BL	TG, TO, TS	11.000 kg	11.000 kg	11.000 kg	3000	635	525	45	121	2,032.80
		H 190/35BL	TG, TO, TS	9950 kg	11.000 kg	11.000 kg	3500	635	525	45	140	2,293.20
		H 190/40BL	TG, TO, TS	7960 kg	8680 kg	9480 kg	4000	635	525	45	159	2,671.20
		H 190/45BL	TG, TO, TS	6620 kg	7130 kg	7690 kg	4500	635	525	45	178	2,896.95
		H 190/50BL	TG, TO, TS	5660 kg	6040 kg	6450 kg	5000	635	525	45	197	3,206.70

The table values refer to a pair of ramps.

Lower end detail - Standard



Lower end detail - Van

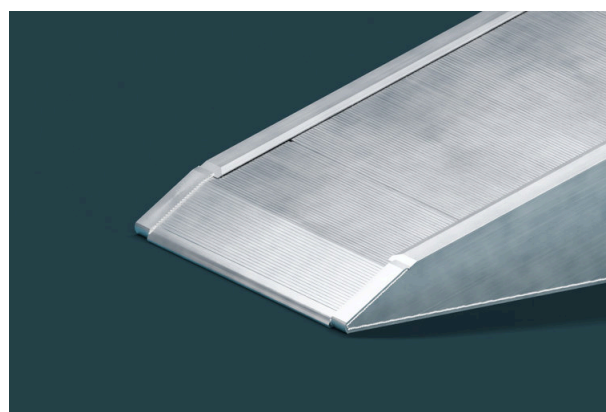

H220



Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

2500 - 5000 mm

Weight per pair

112 - 226 kg

Securing devices





Side view



With edges







Without edges




TS

TG

TO



Ramps in position - Standard, Van and H40

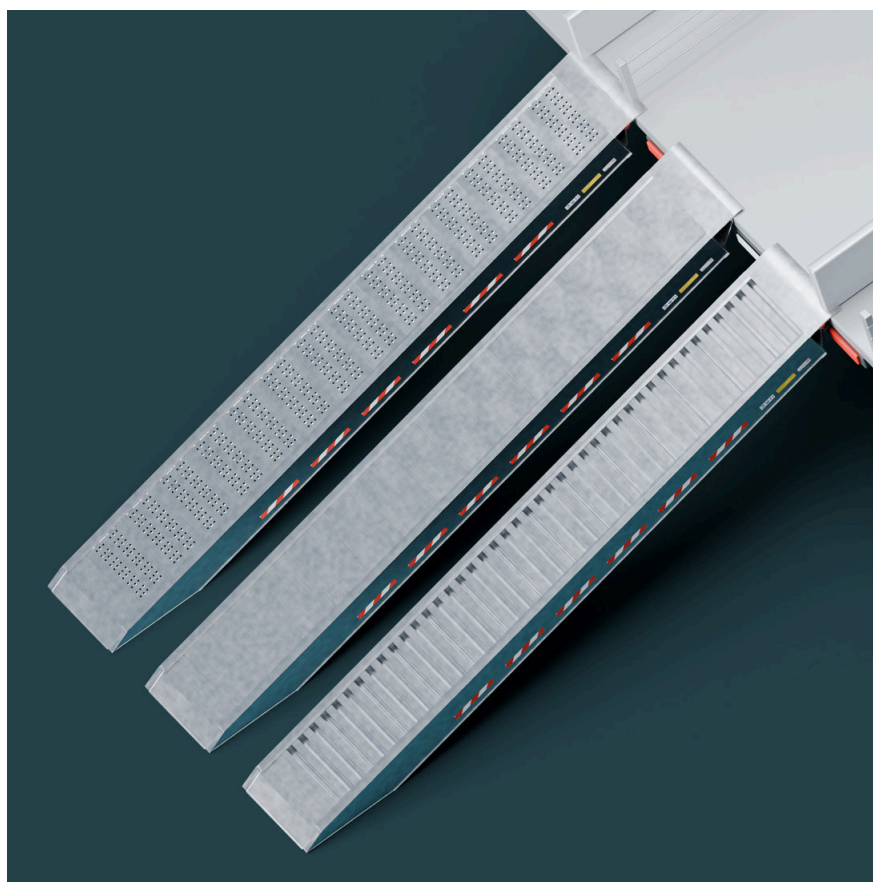

Rung Van



Rung Standard



Rung H40

Ramps for loads of up to 12.5 tonnes.

The H220 range offers capacities of up to 12,500 kg per pair, depending on length and wheelbase.


Suitable for loading heavy agricultural and earthmoving vehicles.

Available with or without safety edges and with standard, hook or tube ends.


	Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €	
Without edges	Narrow	H 220/25S	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	2500	585	469	-	112	1,822.80
		H 220/30S	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	3000	585	469	-	133	2,165.10
		H 220/35S	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	3500	585	469	-	154	2,425.50
		H 220/40S	TG, TO, TS	11.840 kg	12.000 kg	12.500 kg	4000	585	469	-	175	2,664.90
		H 220/45S	TG, TO, TS	9870 kg	10.610 kg	11.440 kg	4500	585	469	-	196	2,984.10
		H 220/50S	TG, TO, TS	8450 kg	9000 kg	9610 kg	5000	585	469	-	218	3,319.05
	Wide	H 220/25SL	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	2500	635	519	-	117	1,904.70
		H 220/30SL	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	3000	635	519	-	139	2,262.75
		H 220/35SL	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	3500	635	519	-	160	2,520.00
		H 220/40SL	TG, TO, TS	11.840 kg	12.000 kg	12.500 kg	4000	635	519	-	182	2,770.95
		H 220/45SL	TG, TO, TS	9870 kg	10.610 kg	11.440 kg	4500	635	519	-	204	3,105.90
		H 220/50SL	TG, TO, TS	8450 kg	9000 kg	9610 kg	5000	635	519	-	226	3,440.85
With edges	Narrow	H 220/25B	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	2500	585	469	53	112	1,822.80
		H 220/30B	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	3000	585	469	53	133	2,165.10
		H 220/35B	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	3500	585	469	53	154	2,425.50
		H 220/40B	TG, TO, TS	11.840 kg	12.000 kg	12.500 kg	4000	585	469	53	175	2,664.90
		H 220/45B	TG, TO, TS	9870 kg	10.610 kg	11.440 kg	4500	585	469	53	196	2,984.10
		H 220/50B	TG, TO, TS	8450 kg	9000 kg	9610 kg	5000	585	469	53	218	3,319.05
	Wide	H 220/25BL	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	2500	635	519	53	117	1,904.70
		H 220/30BL	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	3000	635	519	53	139	2,262.75
		H 220/35BL	TG, TO, TS	12.500 kg	12.500 kg	12.500 kg	3500	635	519	53	160	2,520.00
		H 220/40BL	TG, TO, TS	11.840 kg	12.000 kg	12.500 kg	4000	635	519	53	182	2,770.95
		H 220/45BL	TG, TO, TS	9870 kg	10.610 kg	11.440 kg	4500	635	519	53	204	3,105.90
		H 220/50BL	TG, TO, TS	8450 kg	9000 kg	9610 kg	5000	635	519	53	226	3,440.85

The table values refer to a pair of ramps.

Lower end detail - Standard

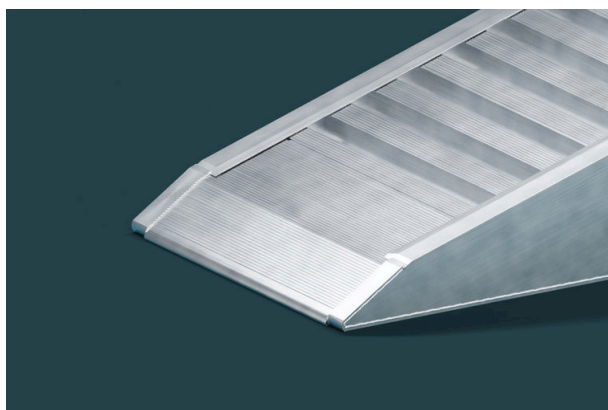

Lower end detail - Van

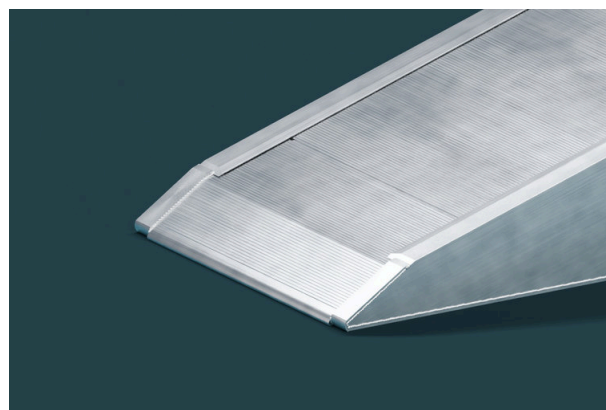

HD100B



Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1500 - 5000 mm


Weight per pair

78 - 140 kg


Securing devices




Side view

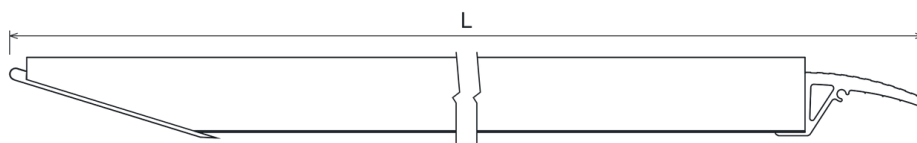


Cross-section






TS




TG




TGB

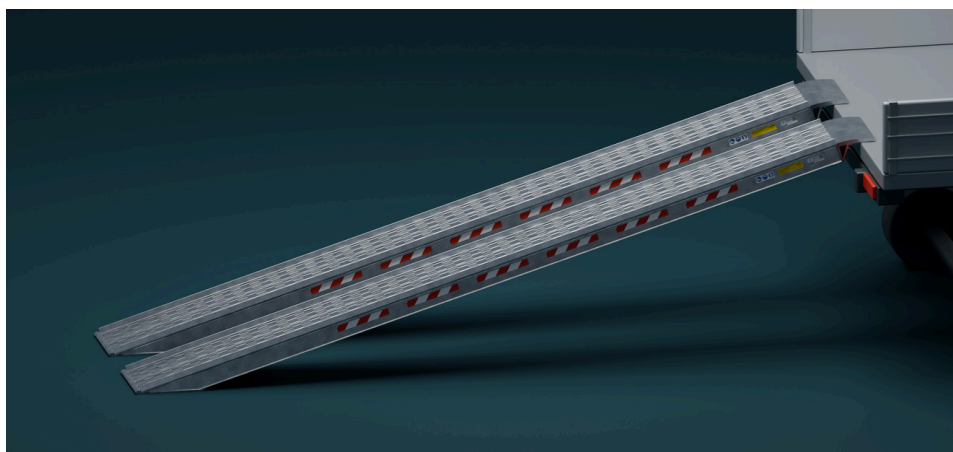

HD100B / upper end TS

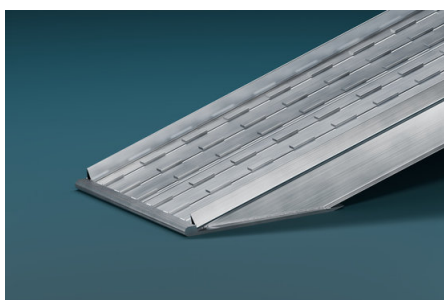

Lower end detail

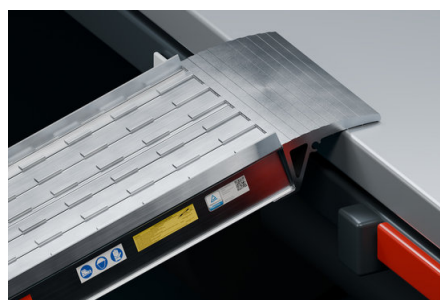



Upper end in position

HD100B ramps for loads of up to 16 tonnes.

The HD100B range offers capacities of up to 16,000 kg per pair, depending on the table configuration.
A choice of lengths and widths is available for loading vehicles and equipment.
The available ends provide a suitable connection to the loading platform.

Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
HD100/15/600B	TS, TG, TO, TGB	16.000 kg	16.000 kg	16.000 kg	1500	584	544	30	78	1,547.91
HD100/20/600B	TS, TG, TO, TGB	16.000 kg	16.000 kg	16.000 kg	2000	584	544	30	98	1,944.81
HD100/25/600B	TS, TG, TO, TGB	16.000 kg	16.000 kg	16.000 kg	2500	584	544	30	117	2,321.87
HD100/30/600B	TS, TG, TO, TGB	14.500 kg	14.500 kg	15.000 kg	3000	584	544	30	136	2,698.92
HD100/35/600B	TS, TG, TO, TGB	11.500 kg	12.500 kg	13.000 kg	3500	584	544	30	156	2,975.43
HD100/40/600B	TS, TG, TO, TGB	9000 kg	10.000 kg	10.800 kg	4000	584	544	30	175	3,183.47
HD100/45/600B	TS, TG, TO, TGB	7500 kg	8100 kg	8700 kg	4500	584	544	30	194	3,529.10
HD100/50/600B	TS, TG, TO, TGB	6500 kg	6900 kg	7300 kg	5000	584	544	30	214	3,892.93
HD100/15/550B	TS, TG, TO, TGB	14.000 kg	14.000 kg	14.000 kg	1500	534	494	30	71	1,409.00
HD100/20/550B	TS, TG, TO, TGB	14.000 kg	14.000 kg	14.000 kg	2000	534	494	30	89	1,766.21
HD100/25/550B	TS, TG, TO, TGB	14.000 kg	14.000 kg	14.000 kg	2500	534	494	30	107	2,123.42
HD100/30/550B	TS, TG, TO, TGB	13.500 kg	13.500 kg	13.500 kg	3000	534	494	30	124	2,460.78
HD 100/35/550B	TS, TG, TO, TGB	10.000 kg	10.600 kg	11.200 kg	3500	534	494	30	142	2,708.40
HD100/40/550B	TS, TG, TO, TGB	8000 kg	8700 kg	9700 kg	4000	534	494	30	159	2,892.41
HD100/45/550B	TS, TG, TO, TGB	6900 kg	7400 kg	8000 kg	4500	534	494	30	177	3,219.86
HD100/50/550B	TS, TG, TO, TGB	5900 kg	6300 kg	6700 kg	5000	534	494	30	195	3,547.30
HD100/15/400B	TS, TG, TO, TGB	11.500 kg	11.500 kg	11.500 kg	1500	392	352	30	51	1,012.10
HD100/20/400B	TS, TG, TO, TGB	11.500 kg	11.500 kg	11.500 kg	2000	392	352	30	64	1,270.08
HD100/25/400B	TS, TG, TO, TGB	11.500 kg	11.500 kg	11.500 kg	2500	392	352	30	77	1,528.07
HD100/30/400B	TS, TG, TO, TGB	9000 kg	9300 kg	9500 kg	3000	392	352	30	89	1,766.21
HD100/35/400B	TS, TG, TO, TGB	7000 kg	7700 kg	8000 kg	3500	392	352	30	102	1,945.47
HD100/40/400B	TS, TG, TO, TGB	5500 kg	6000 kg	6500 kg	4000	392	352	30	115	2,092.00
HD100/45/400B	TS, TG, TO, TGB	4500 kg	4900 kg	5300 kg	4500	392	352	30	127	2,310.29
HD100/50/400B	TS, TG, TO, TGB	4000 kg	4150 kg	4400 kg	5000	392	352	30	140	2,546.78

The table values refer to a pair of ramps.

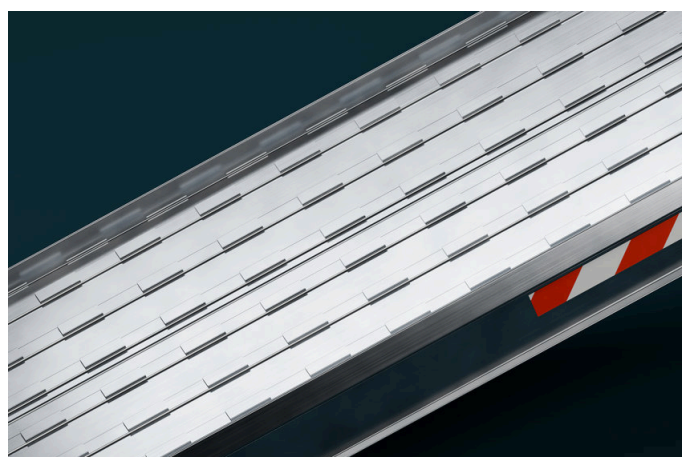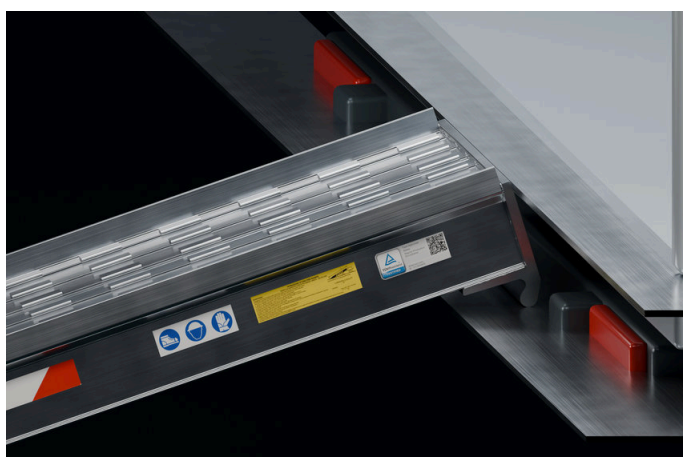

HD100L



Categories

 Earthmoving

 Gardening

 Logistics

 Trailers

 Accessibility

 Motorcycles

 Container

Dimensions

Length

1500 - 5000 mm


Weight per pair

30 - 196 kg


Securing devices




Side view




Cross-section

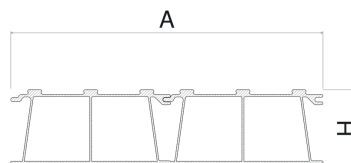




TS




TG



TGB

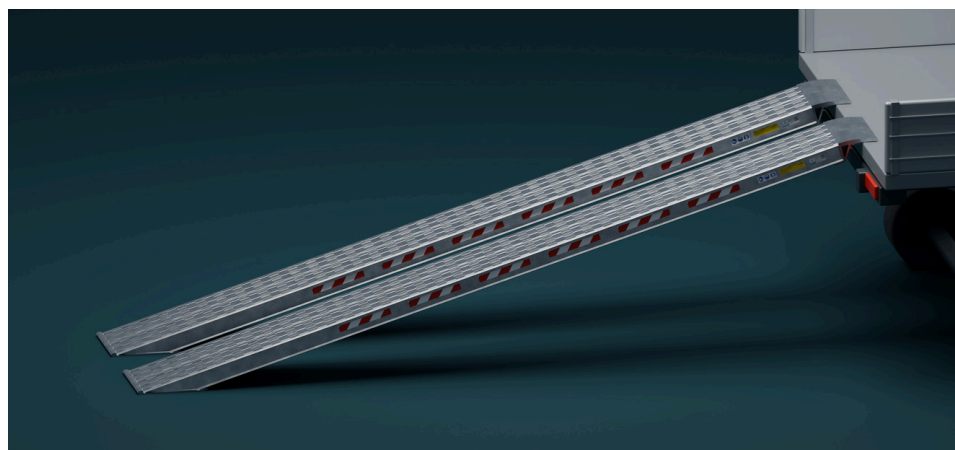

HD100L / upper end TS

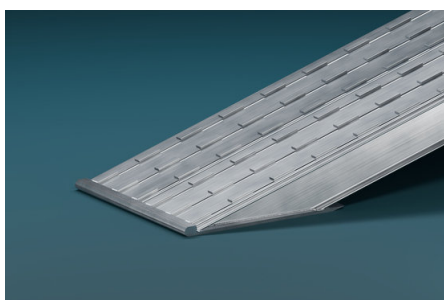

Lower end detail





Upper end in position

HD100L ramps for loading heavy vehicles.

The HD100L range offers capacities of up to 14,000 kg per pair, depending on the table configuration. Lengths, widths and ends allow the ramp to be selected to suit the vehicle being loaded. The tables show the permitted load capacities for the different wheelbases.

Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
HD100/15/300S	TS, TG, TO, TGB	8500 kg	8500 kg	8500 kg	1500	292			30	595.35
HD100/20/300S	TS, TG, TO, TGB	8500 kg	8500 kg	8500 kg	2000	292			37	734.27
HD100/25/300S	TS, TG, TO, TGB	8500 kg	8500 kg	8500 kg	2500	292			45	893.03
HD100/30/300S	TS, TG, TO, TGB	7000 kg	7300 kg	7500 kg	3000	292			52	1,031.94
HD100/35/300S	TS, TG, TO, TGB	4800 kg	5200 kg	6100 kg	3500	292			59	1,125.33
HD100/40/300S	TS, TG, TO, TGB	4200 kg	4600 kg	5100 kg	4000	292			67	1,218.82
HD100/45/300S	TS, TG, TO, TGB	3500 kg	3800 kg	4100 kg	4500	292			74	1,346.15
HD100/50/300S	TS, TG, TO, TGB	2900 kg	3100 kg	3400 kg	5000	292			82	1,491.68
HD100/15/350S	TS, TG, TO, TGB	8500 kg	8500 kg	8500 kg	1500	342			40	793.80
HD100/20/350S	TS, TG, TO, TGB	10.000 kg	10.000 kg	10.000 kg	2000	342			49	972.41
HD100/25/350S	TS, TG, TO, TGB	10.000 kg	10.000 kg	10.000 kg	2500	342			59	1,170.86
HD100/30/350S	TS, TG, TO, TGB	8250 kg	8400 kg	8500 kg	3000	342			68	1,349.46
HD100/35/350S	TS, TG, TO, TGB	7000 kg	7500 kg	8000 kg	3500	342			78	1,487.71
HD100/40/350S	TS, TG, TO, TGB	5500 kg	6000 kg	6500 kg	4000	342			88	1,600.83
HD100/45/350S	TS, TG, TO, TGB	4500 kg	4900 kg	5200 kg	4500	342			98	1,782.74
HD100/50/350S	TS, TG, TO, TGB	3900 kg	4100 kg	4300 kg	5000	342			108	1,964.66
HD100/15/400S	TS, TG, TO, TGB	12.000 kg	12.000 kg	1200 kg	1500	392			49	972.41
HD100/20/400S	TS, TG, TO, TGB	11.500 kg	11.500 kg	11.500 kg	2000	392			61	1,210.55
HD100/25/400S	TS, TG, TO, TGB	11.000 kg	11.000 kg	11.000 kg	2500	392			72	1,428.84
HD100/30/400S	TS, TG, TO, TGB	9500 kg	9500 kg	9500 kg	3000	392			84	1,666.98
HD100/35/400S	TS, TG, TO, TGB	7000 kg	7500 kg	8000 kg	3500	392			96	1,831.03
HD100/40/400S	TS, TG, TO, TGB	5500 kg	6000 kg	6500 kg	4000	392			107	1,946.47
HD100/45/400S	TS, TG, TO, TGB	4500 kg	4900 kg	5200 kg	4500	392			119	2,164.76
HD100/50/400S	TS, TG, TO, TGB	3900 kg	4050 kg	4200 kg	5000	392			131	2,383.06

The table values refer to a pair of ramps.

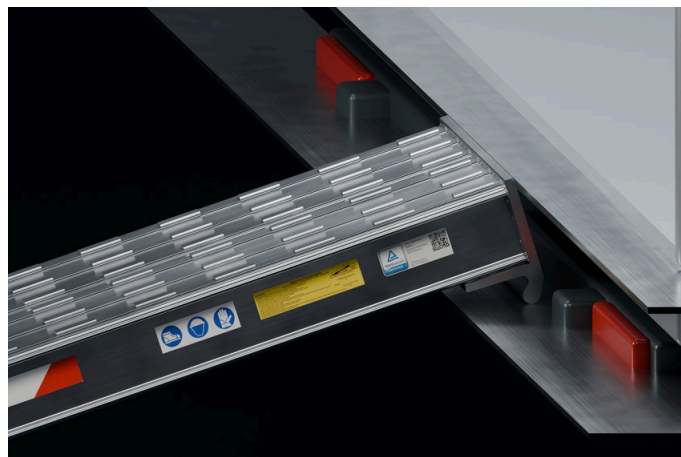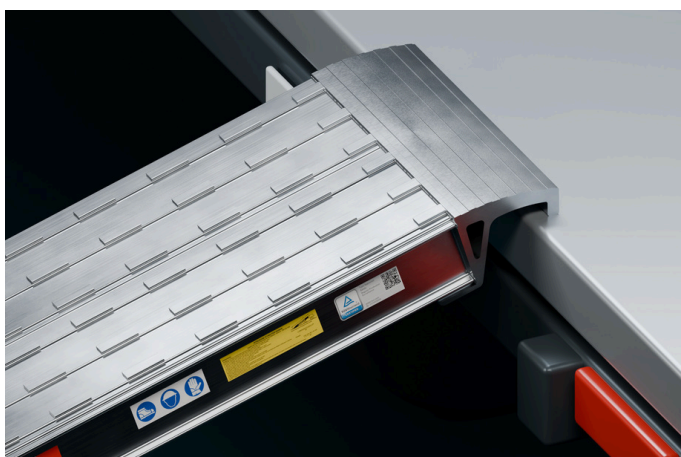


HD 100L

Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
HD100/15/450S	TS, TG, TO, TGB	12.000 kg	12.000 kg	12.000 kg	1500	434			50	992.25
HD100/20/450S	TS, TG, TO, TGB	11.500 kg	11.500 kg	11.500 kg	2000	434			61	1,210.55
HD100/25/450S	TS, TG, TO, TGB	11.000 kg	11.000 kg	11.000 kg	2500	434			72	1,428.84
HD100/30/450S	TS, TG, TO, TGB	10.500 kg	10.500 kg	10.500 kg	3000	434			84	1,666.98
HD100/35/450S	TS, TG, TO, TGB	7300 kg	8100 kg	9300 kg	3500	434			95	1,811.96
HD100/40/450S	TS, TG, TO, TGB	6500 kg	7000 kg	7700 kg	4000	434			106	1,928.27
HD100/45/450S	TS, TG, TO, TGB	5300 kg	5700 kg	6200 kg	4500	434			117	2,128.38
HD100/50/450S	TS, TG, TO, TGB	4600 kg	4900 kg	5200 kg	5000	434			128	2,328.48
HD100/15/500S	TS, TG, TO, TGB	12.000 kg	12.000 kg	12.000 kg	1500	484			58	1,151.01
HD100/20/500S	TS, TG, TO, TGB	12.000 kg	12.000 kg	12.000 kg	2000	484			71	1,409.00
HD100/25/500S	TS, TG, TO, TGB	12.000 kg	12.000 kg	12.000 kg	2500	484			84	1,666.98
HD100/30/500S	TS, TG, TO, TGB	11.000 kg	11.000 kg	11.000 kg	3000	484			98	1,944.81
HD100/35/500S	TS, TG, TO, TGB	10.000 kg	10.000 kg	10.000 kg	3500	484			111	2,117.14
HD100/40/500S	TS, TG, TO, TGB	7000 kg	7800 kg	8500 kg	4000	484			124	2,255.72
HD100/45/500S	TS, TG, TO, TGB	6000 kg	6400 kg	6800 kg	4500	484			138	2,510.55
HD100/50/500S	TS, TG, TO, TGB	5100 kg	5350 kg	5650 kg	5000	484			151	2,746.88
HD100/15/550S	TS, TG, TO, TGB	12.500 kg	12.500 kg	12.500 kg	1500	534			66	1,309.77
HD100/20/550S	TS, TG, TO, TGB	12.500 kg	12.500 kg	12.500 kg	2000	534			81	1,607.45
HD100/25/550S	TS, TG, TO, TGB	12.000 kg	12.000 kg	12.000 kg	2500	534			96	1,905.12
HD100/30/550S	TS, TG, TO, TGB	11.500 kg	11.500 kg	11.500 kg	3000	534			112	2,222.64
HD100/35/550S	TS, TG, TO, TGB	9500 kg	10.000 kg	11.000 kg	3500	534			127	2,422.31
HD100/40/550S	TS, TG, TO, TGB	7500 kg	8500 kg	9000 kg	4000	534			143	2,601.35
HD100/45/550S	TS, TG, TO, TGB	6500 kg	7000 kg	7500 kg	4500	534			158	2,874.22
HD100/50/550S	TS, TG, TO, TGB	5500 kg	5800 kg	6200 kg	5000	534			173	3,147.09
HD100/15/600S	TS, TG, TO, TGB	14.000 kg	14.000 kg	14.000 kg	1500	584			73	1,448.69
HD100/20/600S	TS, TG, TO, TGB	14.000 kg	14.000 kg	14.000 kg	2000	584			91	1,805.90
HD100/25/600S	TS, TG, TO, TGB	14.000 kg	14.000 kg	14.000 kg	2500	584			108	2,143.26
HD100/30/600S	TS, TG, TO, TGB	13.000 kg	13.000 kg	12.500 kg	3000	584			126	2,500.47
HD100/35/600S	TS, TG, TO, TGB	10.500 kg	11.500 kg	12.000 kg	3500	584			143	2,727.48
HD100/40/600S	TS, TG, TO, TGB	8500 kg	9000 kg	9800 kg	4000	584			161	2,928.80
HD100/45/600S	TS, TG, TO, TGB	7000 kg	7600 kg	8100 kg	4500	584			178	3,238.04
HD100/50/600S	TS, TG, TO, TGB	6000 kg	6300 kg	6700 kg	5000	584			196	3,565.49


Without edges

Support surface

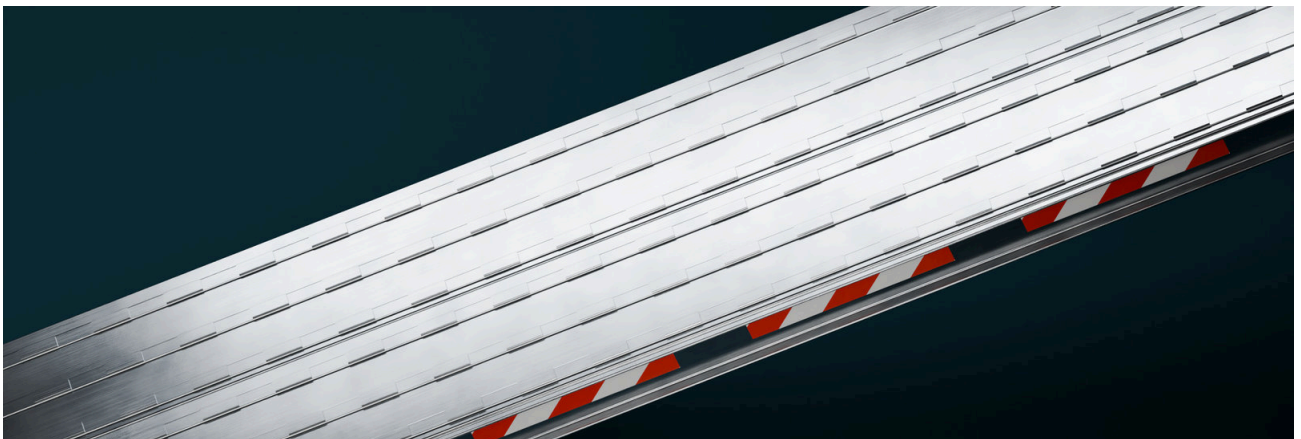


HD 100 L


Nominal width 600 mm

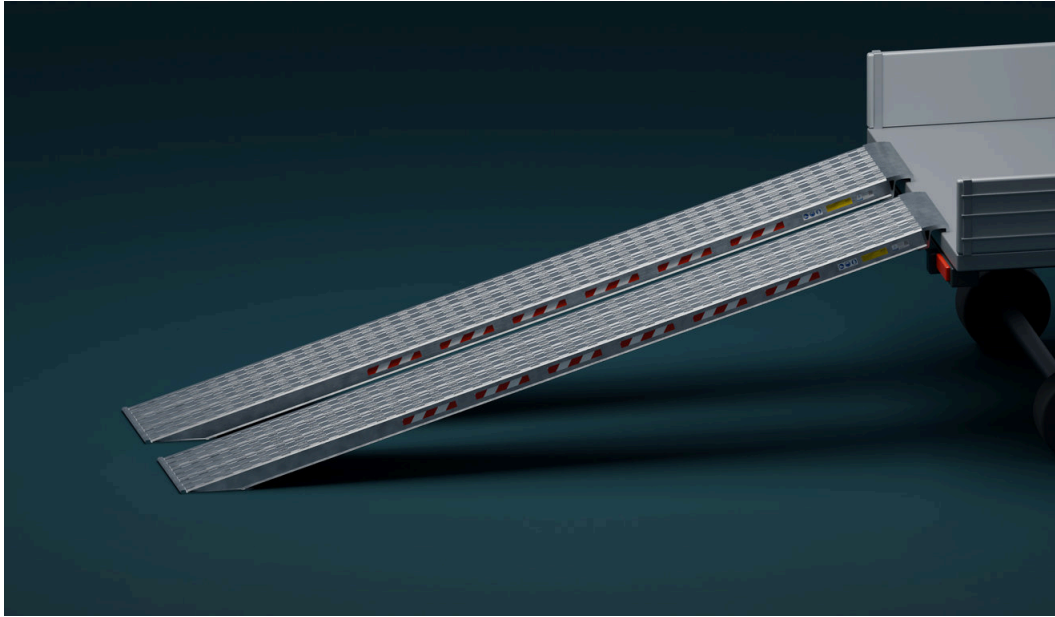


TO end

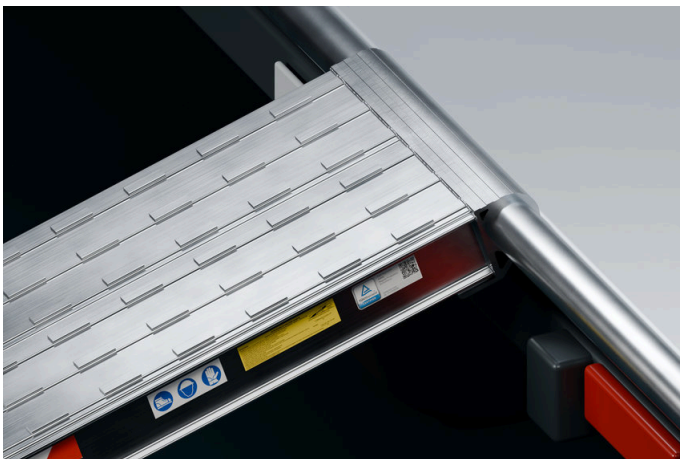

TG end - width 600 mm

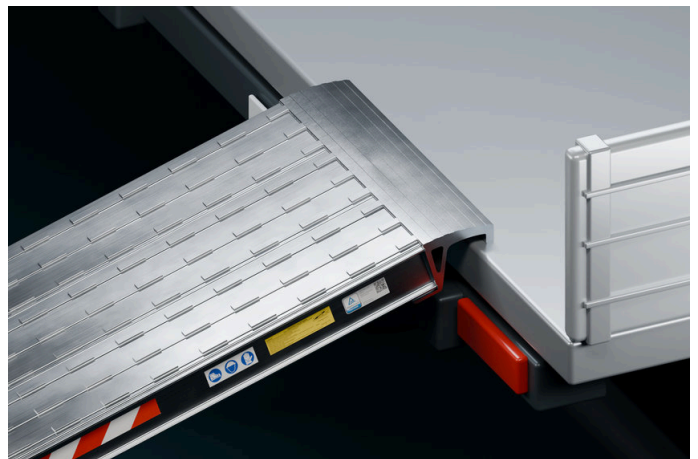

TGB end - pair view

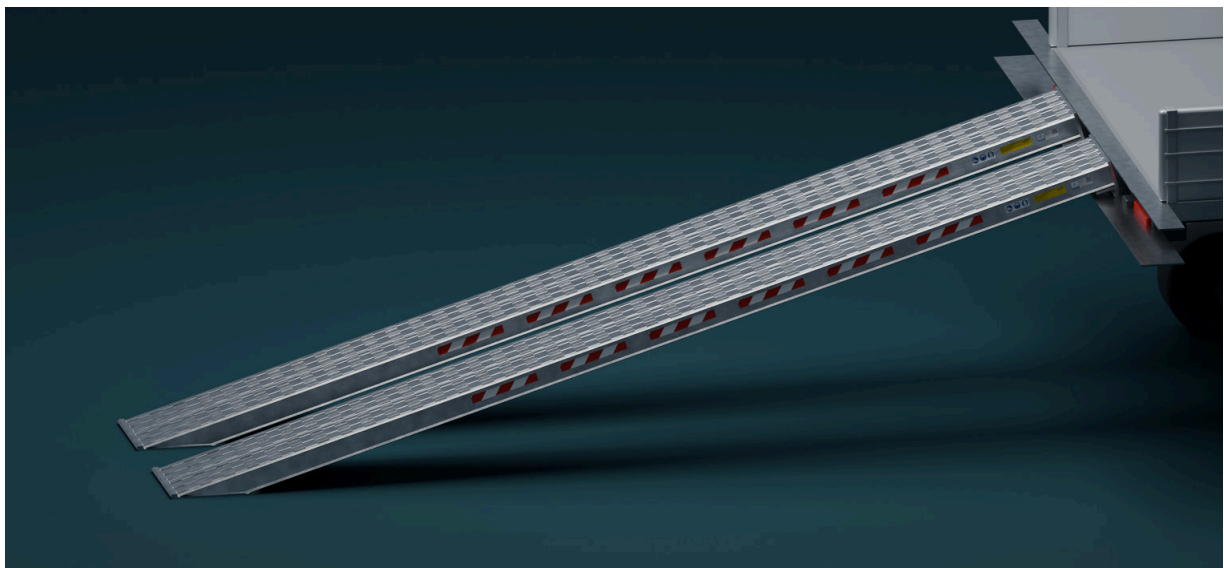

HD100P



Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions

Length

1500 - 5000 mm


Weight per pair

78 - 140 kg


Securing devices




Side view




Cross-section

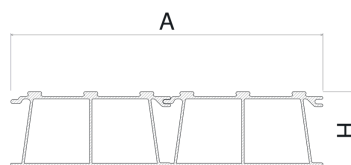




TS




TG




TGB

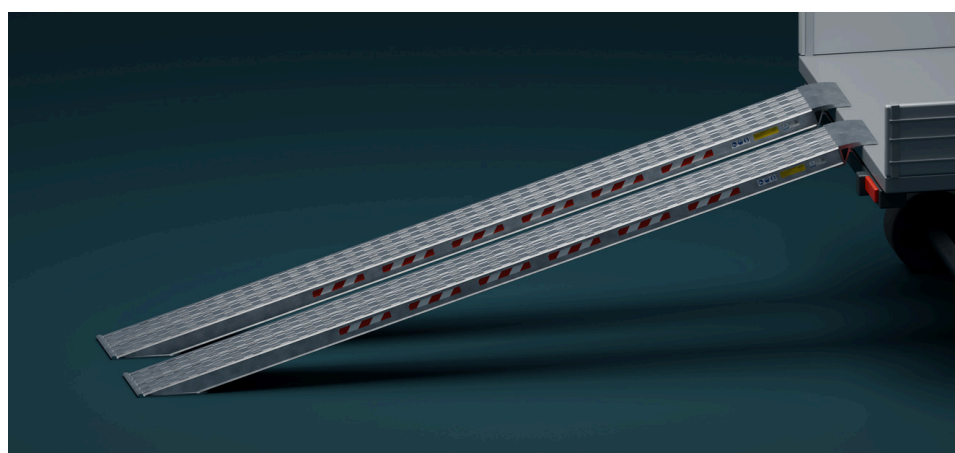

HD100P / upper end TS

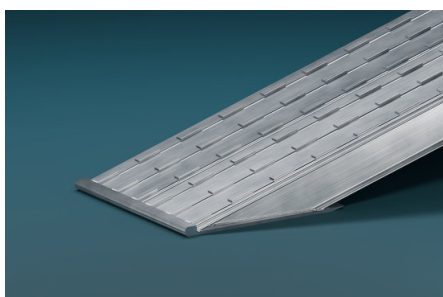

Lower end detail

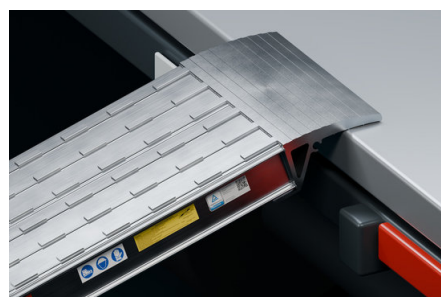

Upper end in position

HD100P ramps for loading heavy vehicles.



The HD100P range offers capacities of up to 22,000 kg per pair, depending on the table configuration.

The range includes a choice of lengths, widths and end configurations.

The load capacity per pair depends on the model and wheelbase specified in the tables.

Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
HD100/15/300PE	TS, TG, TO, TGB	14.680 kg	14.680 kg	14.680 kg	1500	292			40	833.49
HD100/20/300PE	TS, TG, TO, TGB	14.680 kg	14.680 kg	14.680 kg	2000	292			50	1,041.86
HD100/25/300PE	TS, TG, TO, TGB	11.360 kg	11.360 kg	11.360 kg	2500	292			60	1,250.24
HD100/30/300PE	TS, TG, TO, TGB	9000 kg	9280 kg	9280 kg	3000	292			70	1,458.61
HD100/35/300PE	TS, TG, TO, TGB	6760 kg	7520 kg	7840 kg	3500	292			80	1,602.15
HD100/40/300PE	TS, TG, TO, TGB	5400 kg	5880 kg	6440 kg	4000	292			90	1,719.07
HD100/45/300PE	TS, TG, TO, TGB	4480 kg	4800 kg	5200 kg	4500	292			100	1,910.09
HD100/50/300PE	TS, TG, TO, TGB	3800 kg	4080 kg	4360 kg	5000	292			110	2,101.09
HD100/15/350PE	TS, TG, TO, TGB	17.000 kg	17.000 kg	17.000 kg	1500	342			47	979.36
HD100/20/350PE	TS, TG, TO, TGB	17.000 kg	17.000 kg	17.000 kg	2000	342			58	1,208.56
HD100/25/350PE	TS, TG, TO, TGB	13.180 kg	13.180 kg	13.180 kg	2500	342			70	1,458.61
HD100/30/350PE	TS, TG, TO, TGB	10.420 kg	10.760 kg	10.760 kg	3000	342			82	1,708.65
HD100/35/350PE	TS, TG, TO, TGB	7820 kg	8700 kg	9080 kg	3500	342			94	1,882.53
HD100/40/350PE	TS, TG, TO, TGB	6224 kg	6880 kg	7460 kg	4000	342			106	2,024.68
HD100/45/350PE	TS, TG, TO, TGB	5180 kg	5560 kg	6020 kg	4500	342			117	2,234.80
HD100/50/350PE	TS, TG, TO, TGB	4400 kg	4720 kg	5040 kg	5000	342			129	2,464.01
HD100/15/400PE	TS, TG, TO, TGB	19.320 kg	19.320 kg	19.320 kg	1500	392			54	1,125.21
HD100/20/400PE	TS, TG, TO, TGB	19.320 kg	19.320 kg	19.320 kg	2000	392			67	1,396.10
HD100/25/400PE	TS, TG, TO, TGB	15.000 kg	15.000 kg	15.000 kg	2500	392			80	1,666.98
HD100/30/400PE	TS, TG, TO, TGB	11.480 kg	12.240 kg	12.240 kg	3000	392			94	1,958.70
HD100/35/400PE	TS, TG, TO, TGB	8880 kg	9880 kg	10.320 kg	3500	392			107	2,142.88
HD100/40/400PE	TS, TG, TO, TGB	7080 kg	7720 kg	8480 kg	4000	392			121	2,311.21
HD100/45/400PE	TS, TG, TO, TGB	5880 kg	6320 kg	6840 kg	4500	392			134	2,559.51
HD100/50/400PE	TS, TG, TO, TGB	5000 kg	5360 kg	5720 kg	5000	392			148	2,826.93

The table values refer to a pair of ramps.

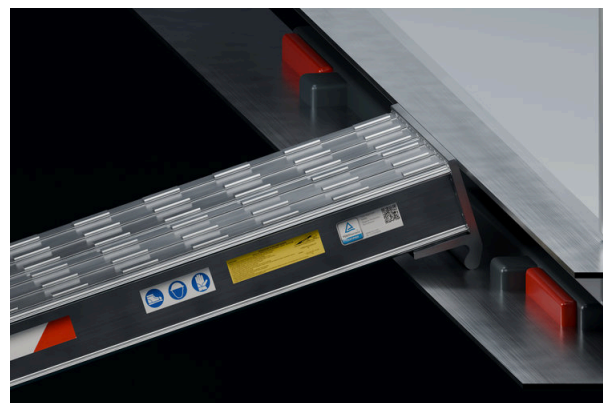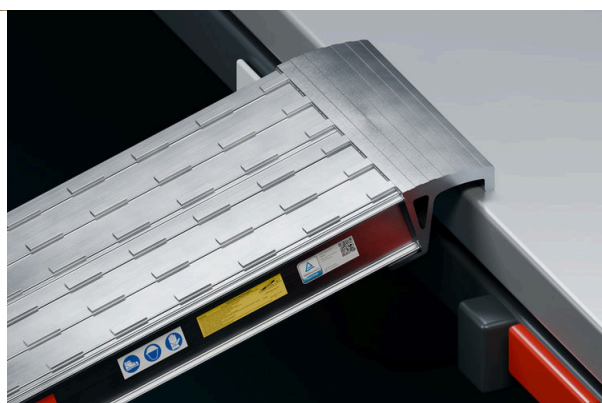


HD 100 P

Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
HD 100/15/450PE	TS, TG, TO, TGB	22.000 kg	22.000 kg	22.000 kg	1500	434			60	1,250.24
HD 100/20/450PE	TS, TG, TO, TGB	22.000 kg	22.000 kg	22.000 kg	2000	434			75	1,562.80
HD 100/25/450PE	TS, TG, TO, TGB	17.040 kg	17.040 kg	17.040 kg	2500	434			90	1,875.35
HD 100/30/450PE	TS, TG, TO, TGB	13.500 kg	13.920 kg	13.92 kg	3000	434			105	2,187.92
HD 100/35/450PE	TS, TG, TO, TGB	10.140 kg	11.280 kg	11.760 kg	3500	434			120	2,403.23
HD 100/40/450PE	TS, TG, TO, TGB	8100 kg	8820 kg	9660 kg	4000	434			135	2,578.61
HD 100/45/450PE	TS, TG, TO, TGB	6720 kg	7200 kg	7800 kg	4500	434			150	2,865.12
HD 100/50/450PE	TS, TG, TO, TGB	5700 kg	6120 kg	6543 kg	5000	434			165	3,151.64
HD 100/15/500PE	TS, TG, TO, TGB	22.000 kg	22.000 kg	22.000 kg	1500	484			67	1,396.10
HD 100/20/500PE	TS, TG, TO, TGB	22.000 kg	22.000 kg	22.000 kg	2000	484			83	1,729.50
HD 100/25/500PE	TS, TG, TO, TGB	19.080 kg	19.080 kg	19.080 kg	2500	484			100	2,083.73
HD 100/30/500PE	TS, TG, TO, TGB	15.000 kg	15.480 kg	15.480 kg	3000	484			117	2,437.96
HD 100/35/500PE	TS, TG, TO, TGB	11.400 kg	12.680 kg	13.240 kg	3500	484			133	2,663.59
HD 100/40/500PE	TS, TG, TO, TGB	9120 kg	9920 kg	10.880 kg	4000	484			150	2,865.12
HD 100/45/500PE	TS, TG, TO, TGB	7680 kg	8080 kg	8760 kg	4500	484			167	3,189.84
HD 100/50/500PE	TS, TG, TO, TGB	6400 kg	6880 kg	7280 kg	5000	484			184	3,514.55
HD 100/15/550PE	TS, TG, TO, TGB	22.000 kg	22.000 kg	22.000 kg	1500	534			73	1,521.12
HD 100/20/550PE	TS, TG, TO, TGB	22.000 kg	22.000 kg	22.000 kg	2000	534			92	1,917.03
HD 100/25/550PE	TS, TG, TO, TGB	20.680 kg	20.680 kg	20.680 kg	2500	534			110	2,292.10
HD 100/30/550PE	TS, TG, TO, TGB	16.340 kg	16.880 kg	16.880 kg	3000	534			129	2,688.01
HD 100/35/550PE	TS, TG, TO, TGB	12.260 kg	13.640 kg	14.240 kg	3500	534			147	2,943.96
HD 100/40/550PE	TS, TG, TO, TGB	9780 kg	10.660 kg	11.700 kg	4000	534			166	3,170.74
HD 100/45/550PE	TS, TG, TO, TGB	8120 kg	8720 kg	9440 kg	4500	534			184	3,514.55
HD 100/50/550PE	TS, TG, TO, TGB	6900 kg	7400 kg	7900 kg	5000	534			203	3,877.47
HD 100/15/600PE	TS, TG, TO, TGB	22.000 kg	22.000 kg	22.000 kg	1500	584			79	1,646.15
HD 100/20/600PE	TS, TG, TO, TGB	22.000 kg	22.000 kg	22.000 kg	2000	584			101	2,104.57
HD 100/25/600PE	TS, TG, TO, TGB	22.000 kg	22.000 kg	22.000 kg	2500	584			120	2,500.47
HD 100/30/600PE	TS, TG, TO, TGB	17.760 kg	18.360 kg	18.360 kg	3000	584			141	2,938.06
HD 100/35/600PE	TS, TG, TO, TGB	13.320 kg	14.820 kg	15.480 kg	3500	584			161	3,224.34
HD 100/40/600PE	TS, TG, TO, TGB	10.620 kg	11.580 kg	12.720 kg	4000	584			182	3,476.35
HD 100/45/600PE	TS, TG, TO, TGB	8820 kg	9480 kg	10.260 kg	4500	584			201	3,839.27
HD 100/50/600PE	TS, TG, TO, TGB	7500 kg	8040 kg	8580 kg	5000	584			222	4,240.38


Without edges

Support surface

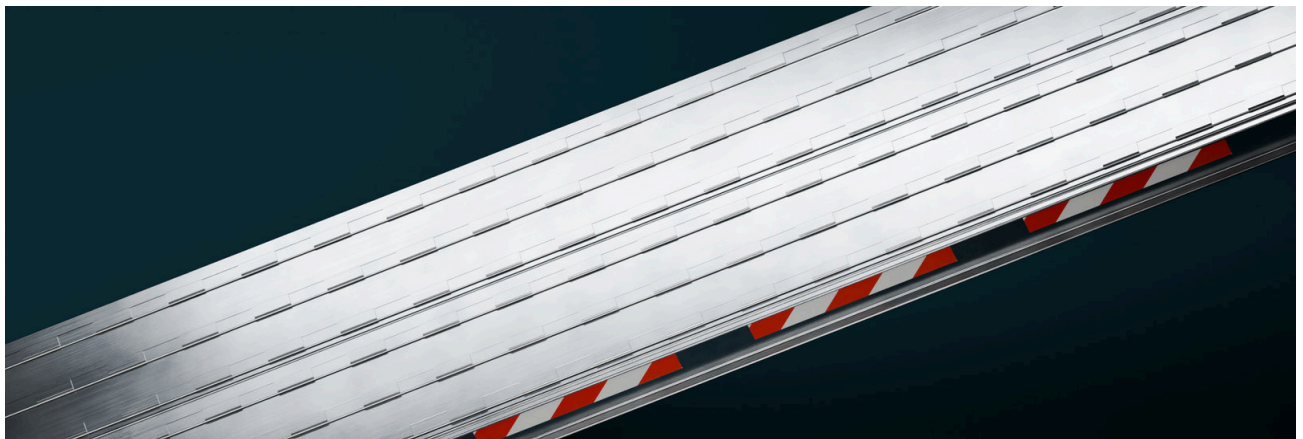


HD 100 P


Nominal width 600 mm

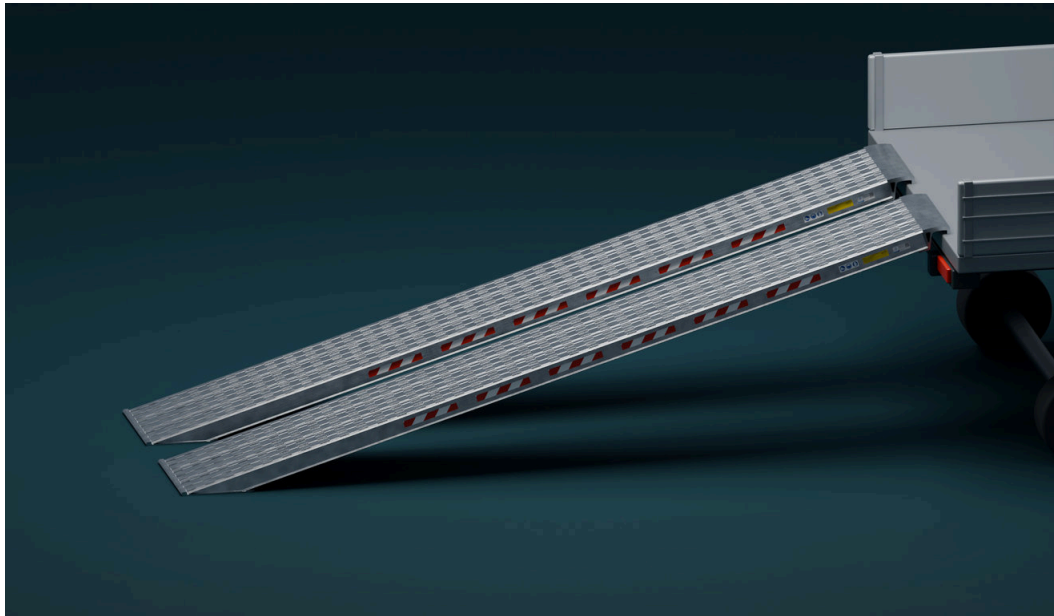


TO end

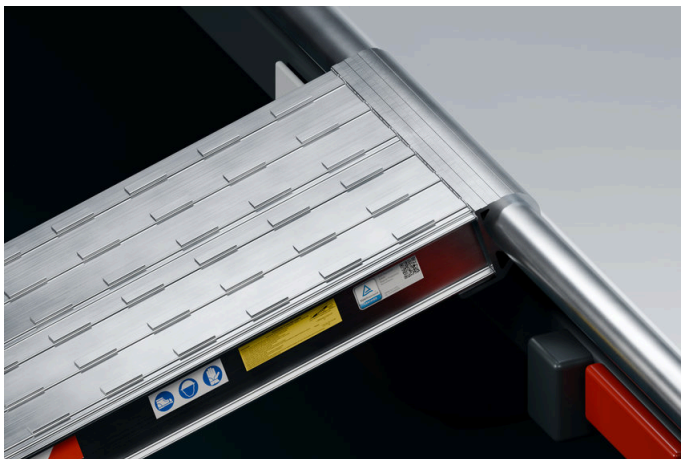

TG end - width 600 mm

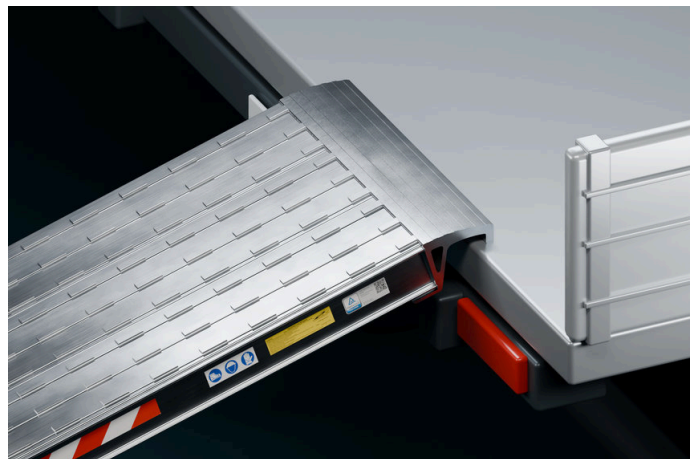

TGB end - pair view

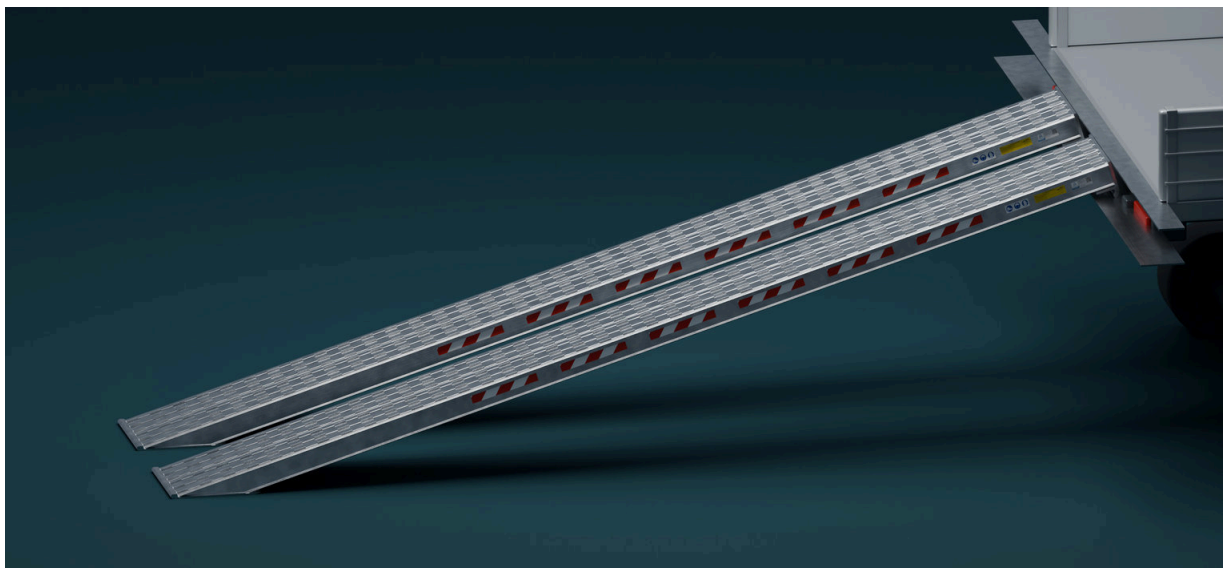

HD115



Categories

 Earthmoving

 Gardening

 Logistics

 Trailers

 Accessibility

 Motorcycles

 Container

Dimensions

Length

2000 - 4000 mm


Weight per pair

83 - 251 kg


Securing devices




Side view

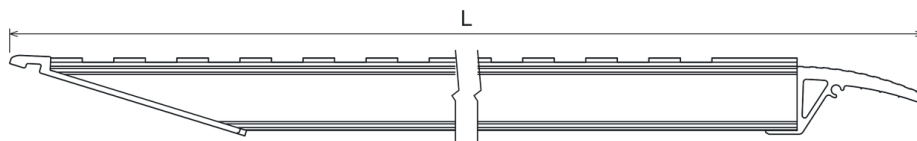


Cross-section

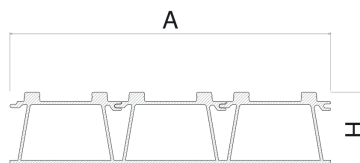




TS




TG




TGB

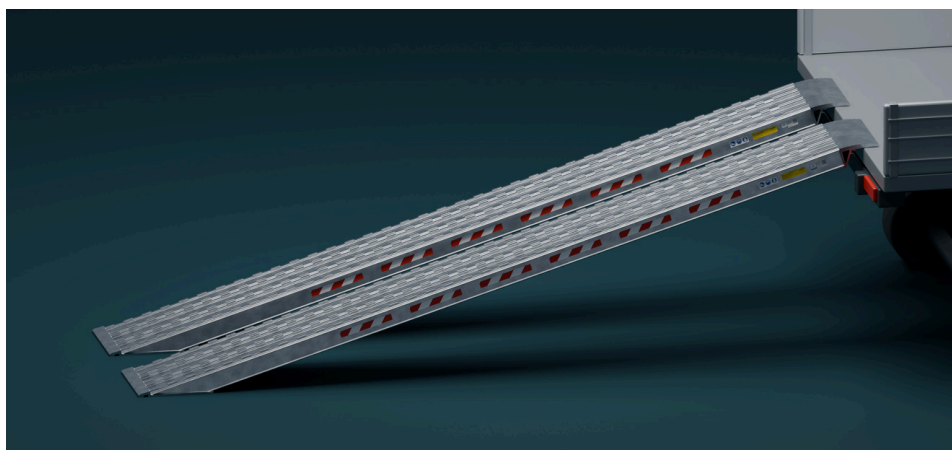

HD115 / upper end TS

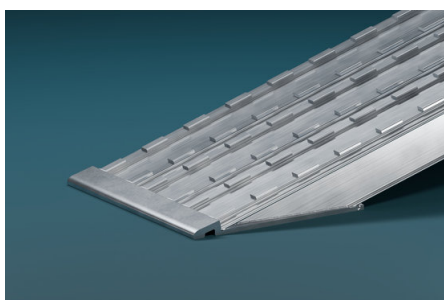

Lower end detail

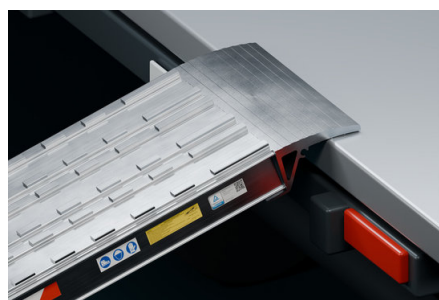

Upper end in position

Special ramps for loading heavy vehicles.



The top-of-the-range HD115 was developed for vehicles with rubber or steel tracks.

It offers capacities of up to 39,000 kg.

Also available with hook, low-hook or tube ends.

Code	Head	Wheelbase 1500 mm kg	Wheelbase 1750 mm kg	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Weight kg	Price €
HD115/20S400	TS, TG, TGB, TO	20.000 kg	20.000 kg	20.000 kg	2000	400	83	1,784.40
HD115/25S400	TS, TG, TGB, TO	17.000 kg	17.000 kg	17.000 kg	2500	400	101	2,171.38
HD115/30S400	TS, TG, TGB, TO	13.600 kg	14.240 kg	14.240 kg	3000	400	119	2,558.36
HD115/35S400	TS, TG, TGB, TO	10.280 kg	11.400 kg	12.080 kg	3500	400	137	2,945.33
HD115/40S400	TS, TG, TGB, TO	8.240 kg	8.960 kg	9.800 kg	4000	400	155	3,332.31
HD115/20S450 L	TG, TGB, TO, TS	24.000 kg	24.000 kg	24.000 kg	2000	450	100	2,149.88
HD115/25S450 L	TGB, TG, TO, TS	24.000 kg	24.000 kg	24.000 kg	2500	450	122	2,622.85
HD115/30S450	TS, TG, TGB, TO	20.400 kg	21.360 kg	21.360 kg	3000	450	144	3,095.82
HD115/35S450	TS, TG, TGB, TO	15.420 kg	17.100 kg	18.120 kg	3500	450	166	3,568.79
HD115/40S450	TS, TG, TGB, TO	12.360 kg	13.440 kg	14.700 kg	4000	450	188	4,041.77
HD115/20S600 L	TGB, TG, TO, TS	26.000 kg	26.000 kg	26.000 kg	2000	600	133	2,859.34
HD115/25S600 L	TGB, TG, TO, TS	26.000 kg	26.000 kg	26.000 kg	2500	600	163	3,504.30
HD115/30S600 L	TS, TG, TGB, TO	26.000 kg	26.000 kg	26.000 kg	3000	600	192	4,127.76
HD115/35S600	TS, TG, TGB, TO	21.000 kg	22.450 kg	24.000 kg	3500	600	221	4,751.23
HD115/40S600	TS, TG, TGB, TO	17.500 kg	18.900 kg	20.000 kg	4000	600	251	5,396.19
HD115/20S450	TGB	28.000 kg	28.000 kg	28.000 kg	2000	450	101	2,171.38
HD115/25S450	TGB	26.000 kg	26.000 kg	26.000 kg	2500	450	123	2,644.35
HD115/20S600	TGB	39.000 kg	39.000 kg	39.000 kg	2000	600	135	2,902.34
HD115/25S600	TGB	34.800 kg	34.800 kg	34.800 kg	2500	600	164	3,525.80
HD115/30S600	TGB	27.500 kg	27.500 kg	27.500 kg	3000	600	194	4,170.76

The table values refer to a pair of ramps.

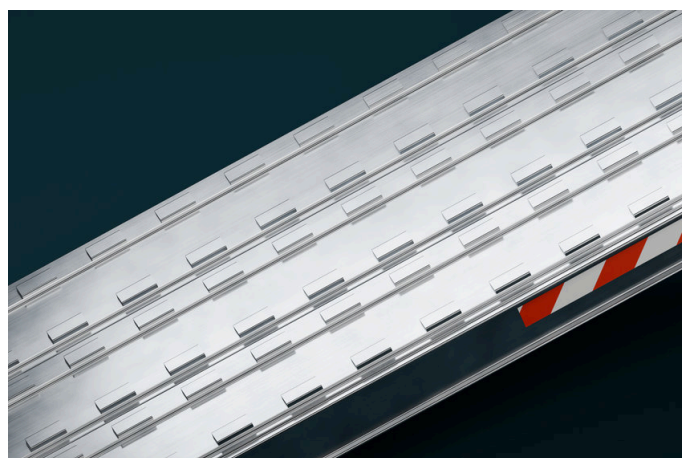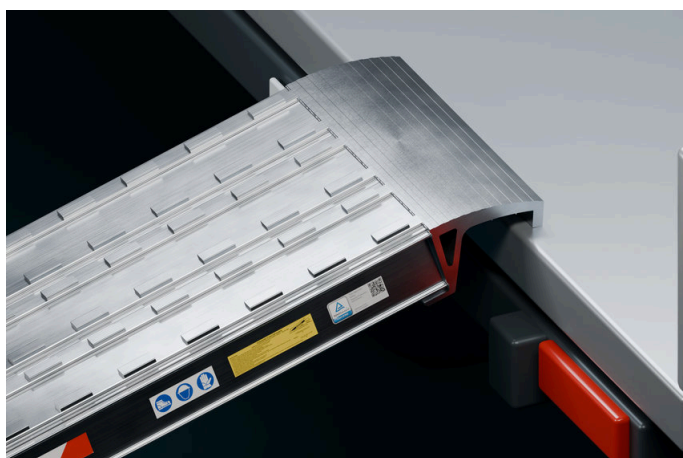

CONTAINER



Categories

Earthmoving

Gardening

Logistics

Trailers

Accessibility

Motorcycles

Container

Dimensions


Length

1000 - 1500 mm


Weight per pair

17 - 65 kg


Side view

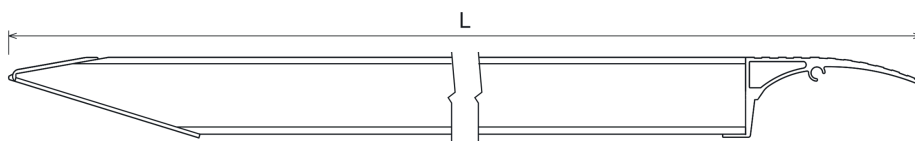


Cross-section

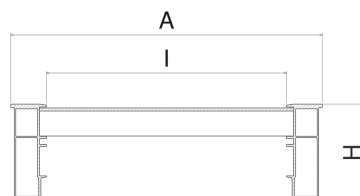


TS190




TS175



TS135




TS100

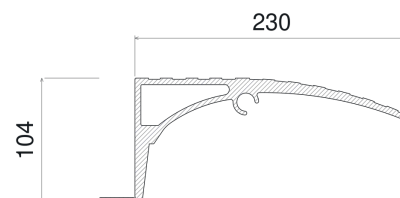

Standard rung



Securing devices

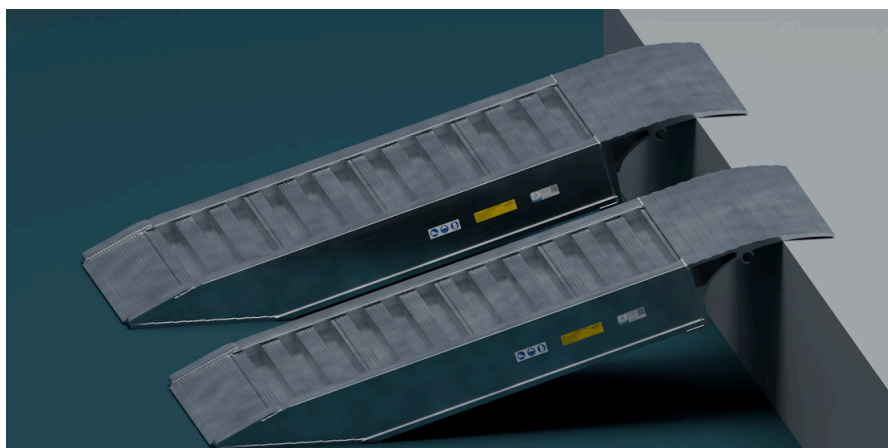

Short pair without edges

Ramps for loading and unloading containers.

These ramps are designed for vehicles in different weight classes when loading and unloading containers and other low loading platforms. The specially shaped ends provide an easy transition and maximum safety.

Code	Head	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Wheelbase 1500 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
Container										
H 100/10SC	TS, TO, TG	3600 kg	3600 kg	3600 kg	1000	380	304		17	357.37
H 100/15SC	TS, TG, TO	3600 kg	3600 kg	3600 kg	1500	380	304		23	481.34
H 135/10SC	TS, TG, TO	7200 kg	7200 kg	7200 kg	1000	440	340		32	617.47
H 135/15SC	TS, TG, TO	7200 kg	7200 kg	7200 kg	1500	440	340		42	807.09
Without edges										
H 155/10SC	TO, TS, TG	8000 kg	8000 kg	8000 kg	1000	480	380		37	711.00
H 155/15SC	TG, TO, TS	8000 kg	8000 kg	8000 kg	1500	480	380		49	940.00
Container										
H 175/10SC	TS, TG, TO	9000 kg	9000 kg	9000 kg	1000	490	390		37	748.76
H 175/15SC	TS, TG, TO	9000 kg	9000 kg	9000 kg	1500	490	390		52	1,025.89
H 190/10SC	TS, TG, TO	12.000 kg	12.000 kg	12.000 kg	1000	500	400		46	872.74
H 190/15SC	TS, TG, TO	12.000 kg	12.000 kg	12.000 kg	1500	500	400		65	1,209.43

The table values refer to a pair of ramps.



Upper end detail



Lower end detail

LOGISTICS



Categories

Earthmoving

Gardening

Logistics


Trailers

Accessibility


Motorcycles

Container

Side view

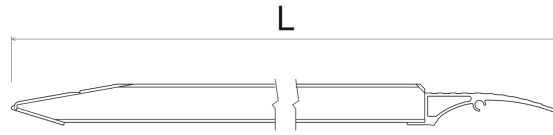



Cross-section

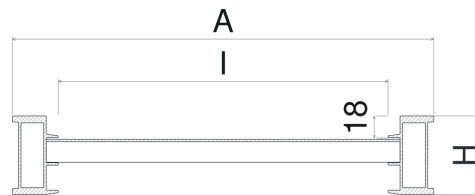

TS50

TS65

TS85



Dimensions


Length

1500 - 3000 mm


Weight

22 - 55 kg

Anti-slip surface



Securing devices

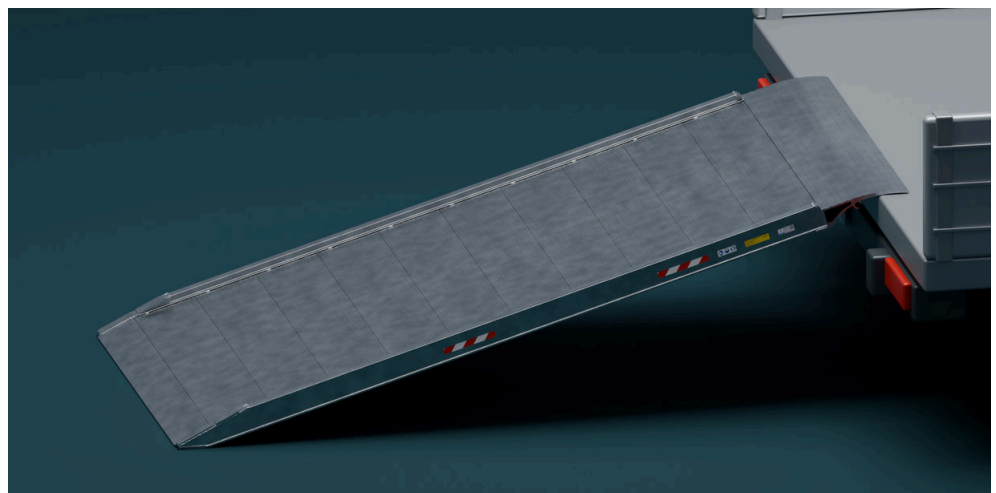

Ramp with edges and anti-slip surface


Special solutions for logistics centres.

These ramps have a milled, anti-slip running surface.


They can be adapted on request to different vehicle and step heights.

Also available with a high-grip coating.

Code	Head	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Wheelbase 1500 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
L 65/15B750	TS, TG, TO	500 kg	500 kg	500 kg	1500	826	750	18	22	448.72
L 65/15B1000	TS, TG, TO	500 kg	500 kg	500 kg	1500	1076	1000	18	25	504.50
L 65/20B750	TS, TG, TO	500 kg	500 kg	500 kg	2000	826	750	18	26	545.74
L 65/20B1000	TS, TG, TO	500 kg	500 kg	500 kg	2000	1076	1000	18	32	645.18
L 100/25B750	TS, TG, TO	600 kg	600 kg	600 kg	2500	826	750	33	35	721.59
L 100/25B1000	TS, TG, TO	600 kg	600 kg	600 kg	2500	1076	1000	33	43	867.12
L 125/30B750	TS, TG, TO	900 kg	900 kg	900 kg	3000	826	750	40	48	964.14
L 125/30B1000	TS, TG, TO	900 kg	900 kg	900 kg	3000	1076	1000	40	54	1,085.42
L 65/15B1000SG	TS, TG, TO	500 kg	500 kg	500 kg	1500	1076	1000	18	26	635.48
L 65/20B1000SG	TS, TG, TO	500 kg	500 kg	500 kg	2000	1076	1000	18	33	818.61
L 100/25B1000SG	TS, TG, TO	600 kg	600 kg	600 kg	2500	1076	1000	33	44	1,084.20
L 125/30B1000SG	TS, TG, TO	900 kg	900 kg	900 kg	3000	1076	1000	40	55	1,334.03

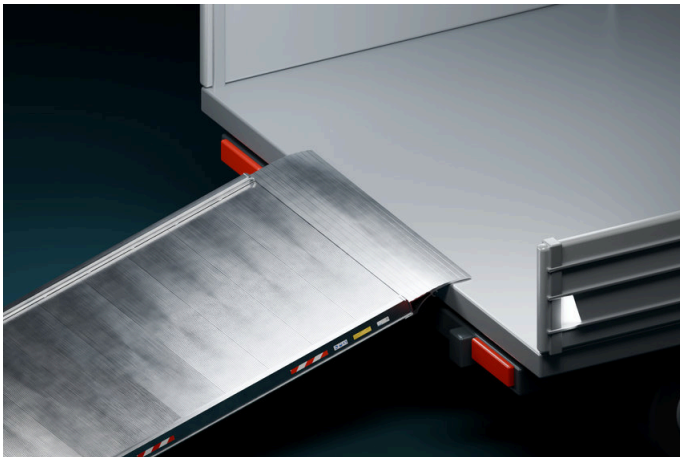

Upper end detail

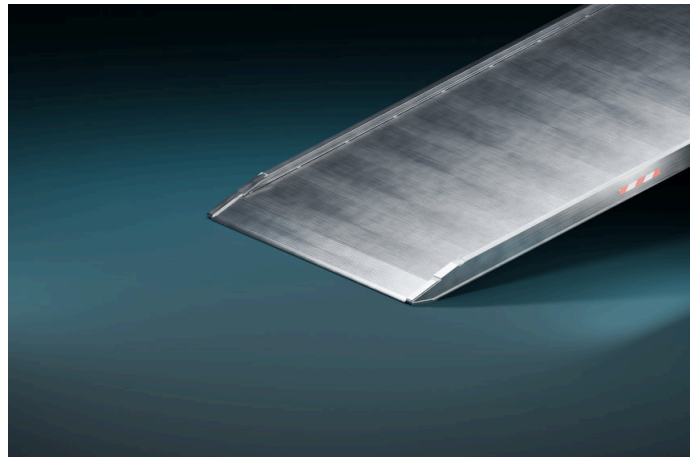

Lower end detail

SINGLE RAMPS



H72B side view



Categories

Earthmoving

Gardening

Logistics


Trailers

Accessibility

Motorcycles

Container


H35 without edges

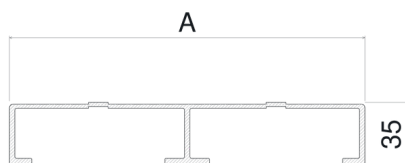


TS50




H72 with edges

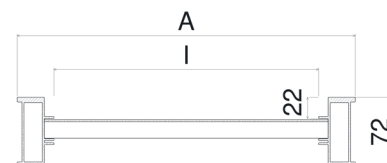


TS35



Standard rung



H35 running surface

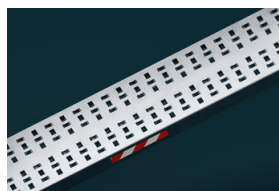

Securing devices




Dimensions

Length

1500 - 3000 mm

Weight

6 - 13 kg

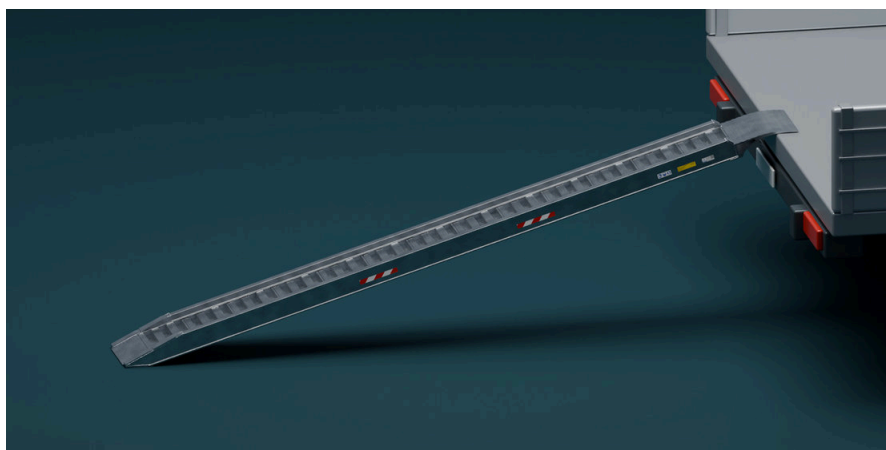


Single ramp with edges


Single ramps for special applications.

Single ramps offer capacities of up to 600 kg in the specified configurations.
The range includes different lengths and designs for access and loading needs.
Model selection depends on the required load capacity and support conditions.


Code	Head	Wheelbase 500 mm kg	Wheelbase 750 mm kg	Wheelbase 1000 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
S35/15P	TS, TA	225 kg	225 kg	225 kg	1500	200	-	-	6	243.11
S35/20P	TS, TA	175 kg	175 kg	175 kg	2000	200	-	-	8	261.33
S35/25P	TS, TA	150 kg	150 kg	150 kg	2500	200	-	-	9	291.72
S35/30P	TS, TA	125 kg	125 kg	125 kg	3000	200	-	-	11	328.19
S72/15B	TS, TG, TO	600 kg	600 kg	600 kg	1500	276	200	22	9	170.17
S72/20B	TS, TG, TO	600 kg	600 kg	600 kg	2000	276	200	22	11	206.64
S72/25B	TS, TG, TO	600 kg	600 kg	600 kg	2500	276	200	22	13	243.11
S72/30B	TS, TG, TO	600 kg	600 kg	600 kg	3000	276	200	22	16	297.80

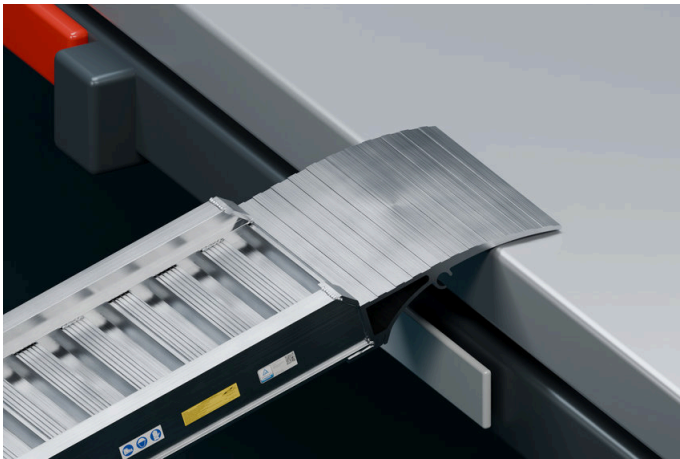

Upper end detail

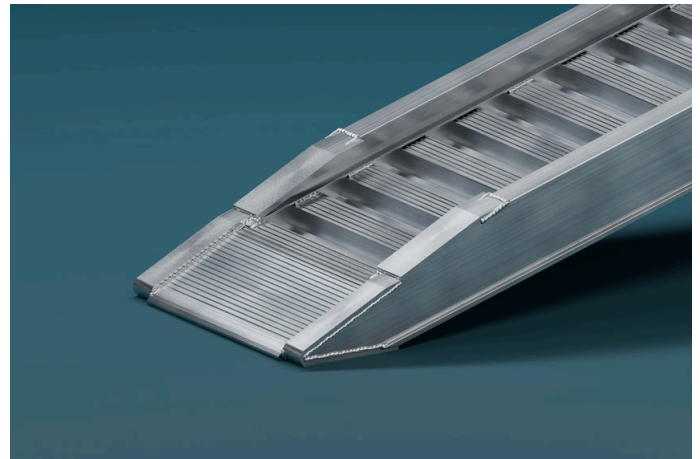

Lower end detail

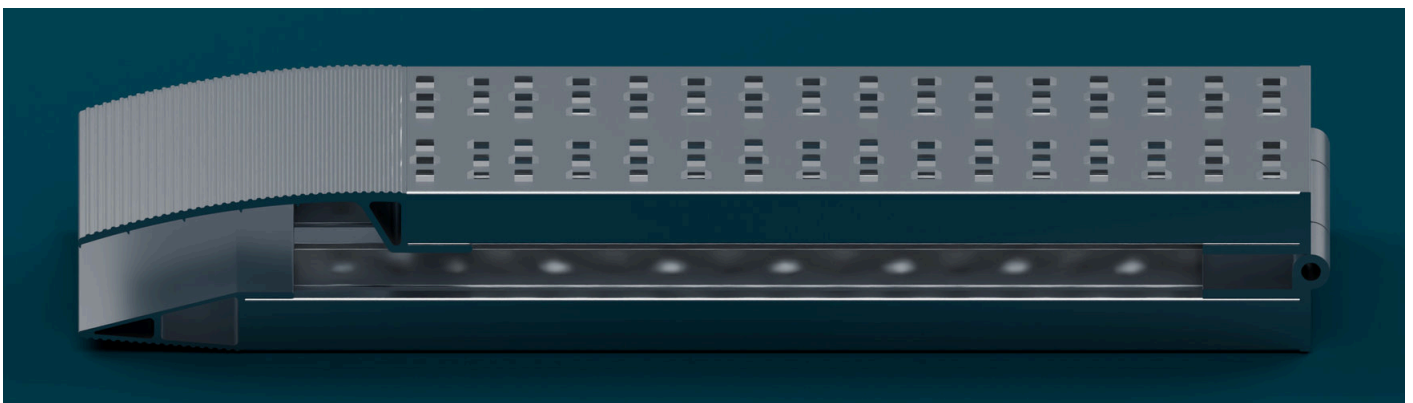


H35 folding - 1500 mm model

ACCESSIBILITY



Side view of H72 with edges

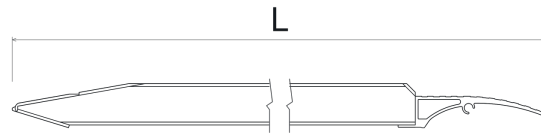

Categories

Earthmoving

Gardening

Logistics


Trailers

Accessibility

Motorcycles

Container


H35 without edges

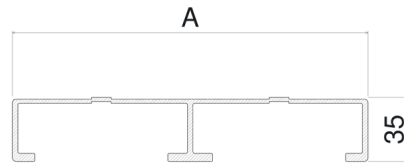


TS50




H72 with edges

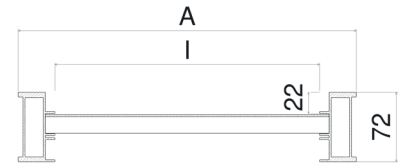


TS35

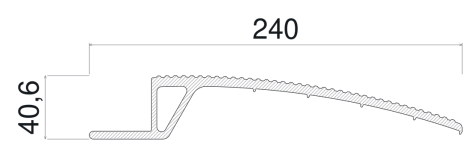

Van rung - H72B

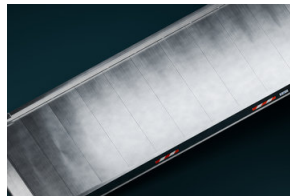

H35 running surface

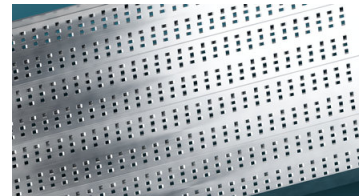

Dimensions


Length

1500 - 2500 mm

Weight

15 - 40 kg

Securing devices

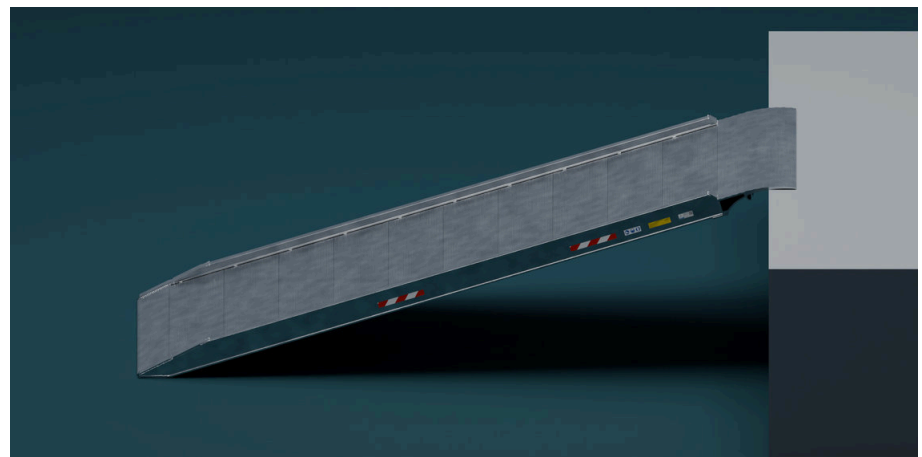

H72B in position - 2000 x 800 mm outer dimensions



H35 upper end detail

Ramps for accessibility and mobility aids.


Aluminium ramps for overcoming height differences with mobility aids.

The configuration is selected according to the length, end and capacity specified in the table.


The range includes different versions to suit a variety of access requirements.

Code	Head	Wheelbase 1000 mm kg	Wheelbase 1250 mm kg	Wheelbase 1500 mm kg	Length mm	Ext. width mm	Int. width mm	Edge mm	Weight kg	Price €
L 72/15B750	TS, TG, TO	400 kg	400 kg	400 kg	1500	810	734	22	16	340.35
L 72/15B1000	TS, TG, TO	400 kg	400 kg	400 kg	1500	1060	984	22	20	420.22
L 72/20B750	TS, TG, TO	400 kg	400 kg	400 kg	2000	810	734	22	22	450.31
L 72/20B1000	TS, TG, TO	400 kg	400 kg	400 kg	2000	1060	984	22	28	566.08
L 72/25B750	TS, TG, TO	400 kg	400 kg	400 kg	2500	810	734	22	30	601.97
L 72/25B1000	TS, TG, TO	400 kg	400 kg	400 kg	2500	1060	984	22	34	693.42
L 35/15/3S	TS, TA	450 kg	450 kg	450 kg	1500	600	-	-	15	310.24
L 35/15/4S	TS, TA	450 kg	450 kg	450 kg	1500	800	-	-	20	420.22
L 35/20/3S	TS, TA	450 kg	450 kg	450 kg	2000	600	-	-	20	426.01
L 35/20/4S	TS, TA	450 kg	450 kg	450 kg	2000	800	-	-	26	547.55
L 35/25/3S	TS, TA	450 kg	450 kg	450 kg	2500	600	-	-	32	674.90
L 35/25/4S	TS, TA	450 kg	450 kg	450 kg	2500	800	-	-	40	839.28
D 35/15/4P	TS, TA	350 kg	350 kg	350 kg	1500	800	-	-	21	647.00
D 35/20/4P	TS, TA	350 kg	350 kg	350 kg	2000	800	-	-	28	863.00

Load capacities refer to the configurations and wheelbases in the table.

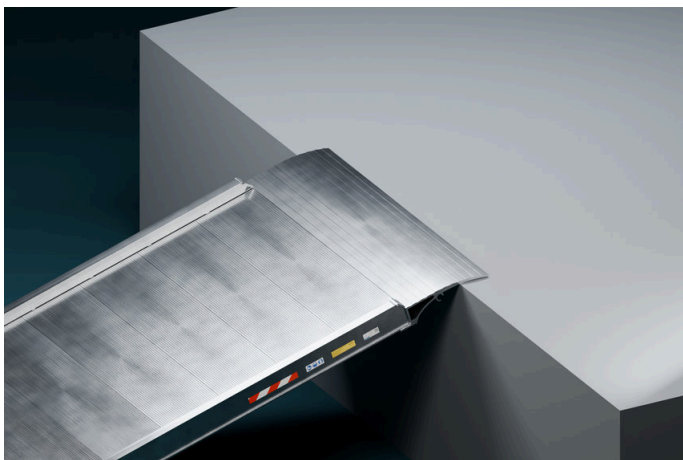

H72B upper end detail

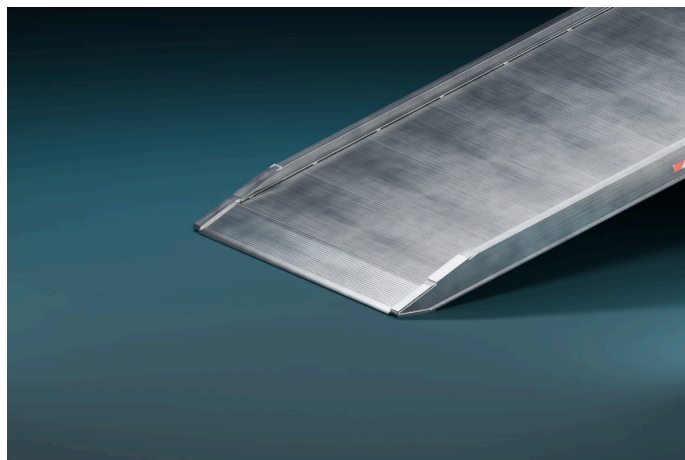

H72B lower end detail

VAN RAMP

Categories

 Earthmoving

 Gardening


 Logistics

 Trailers

 Accessibility

 Motorcycles

 Container

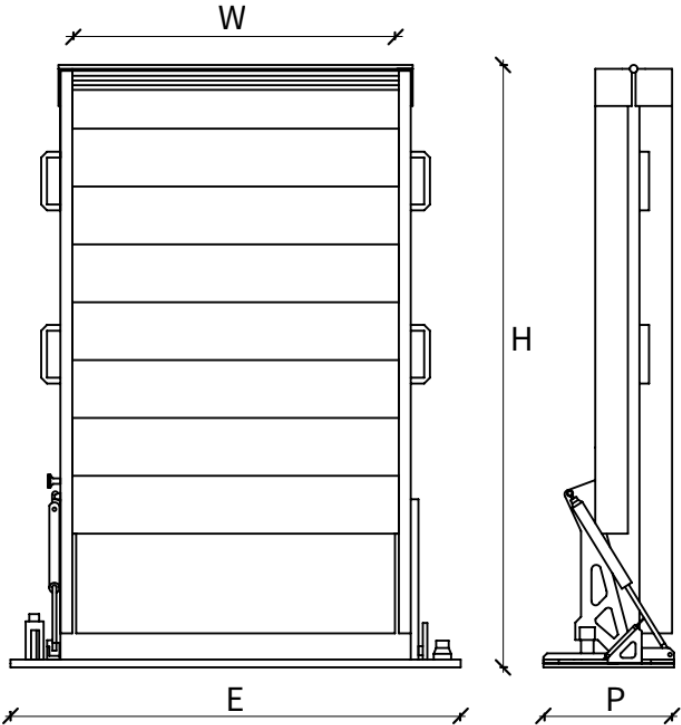


Dimensions

Securing devices



6 - 13




1500 - 3000



Special ramps for vans and commercial vehicles.


- Swivel system with a 180° rotation angle
- Easy opening and closing thanks to a special damper
- Quick and easy installation
- Complies with EEC/Euratom/EC Directive 2006/42/EC
- Manufactured in accordance with EN 1398 and EN 292, parts 1 and 2

Code	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Weight kg	Price €
Swivelling						
VAN TL-86X2000	600 kg	2000	1150	800	32	4,319.91
VAN TL-86X2250	600 kg	2250	1150	800	35	4,458.48
VAN TL-86X2500	600 kg	2500	1150	800	40	4,598.27
VAN TL-86X2700	600 kg	2700	1150	800	43	4,710.09
VAN TL-86X3000	600 kg	3000	1150	800	45	4,936.17
VAN TL-83X2000	300 kg	2000	1150	800	28	3,997.80
VAN TL-83X2250	300 kg	2250	1150	800	30	4,154.61
VAN TL-83X2500	300 kg	2500	1150	800	35	4,250.62
VAN TL-83X2700	300 kg	2700	1150	800	37	4,397.70
VAN TL-83X3000	300 kg	3000	1150	800	40	4,633.51
VAN TL-65X2000	300 kg	2000	1000	650	25	3,938.25
VAN TL-65X2250	300 kg	2250	1000	650	30	4,016.03
VAN TL-65X2500	300 kg	2500	1000	650	35	4,110.84
VAN TL-65X2700	300 kg	2700	1000	650	37	4,205.65
VAN TL-65X3000	300 kg	3000	1000	650	40	4,336.93
VAN TL-106X2000	600 kg	2000	1350	1000	47	4,772.08
VAN TL-106X2250	600 kg	2250	1350	1000	53	4,917.95
VAN TL-106X2500	600 kg	2500	1350	1000	58	4,979.93
VAN TL-106X2700	600 kg	2700	1350	1000	62	5,127.01
VAN TL-106X3000	600 kg	3000	1350	1000	68	5,317.84

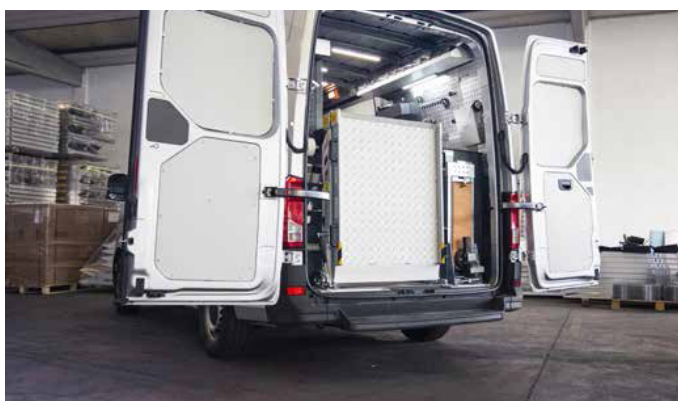

VAN RAMP

Code	Wheelbase 2000 mm kg	Length mm	Ext. width mm	Int. width mm	Weight kg	Price €
Removable						
VAN SL-86X2000	600 kg	2000	1150	800	32	3,701.22
VAN SL-86X2250	600 kg	2250	1150	800	35	3,889.62
VAN SL-86X2500	600 kg	2500	1150	800	40	4,014.82
VAN SL-86X2700	600 kg	2700	1150	800	43	4,110.84
VAN SL-86X3000	600 kg	3000	1150	800	45	4,373.40
VAN SL-83X2000	300 kg	2000	1150	800	28	3,466.63
VAN SL-83X2250	300 kg	2250	1150	800	30	3,555.35
VAN SL-83X2500	300 kg	2500	1150	800	35	3,701.22
VAN SL-83X2700	300 kg	2700	1150	800	37	3,780.23
VAN SL-83X3000	300 kg	3000	1150	800	40	4,092.62
VAN SL-65X2000	300 kg	2000	1000	650	25	3,160.32
VAN SL-65X2250	300 kg	2250	1000	650	30	3,239.32
VAN SL-65X2500	300 kg	2500	1000	650	35	3,524.97
VAN SL-65X2700	300 kg	2700	1000	650	37	3,607.62
VAN SL-65X3000	300 kg	3000	1000	650	40	3,763.21
VAN SL-106X2000	600 kg	2000	1350	1000	47	4,181.34
VAN SL-106X2250	600 kg	2250	1350	1000	53	4,336.93
VAN SL-106X2500	600 kg	2500	1350	1000	58	4,397.70
VAN SL-106X2700	600 kg	2700	1350	1000	62	4,510.75
VAN SL-106X3000	600 kg	3000	1350	1000	68	4,740.48

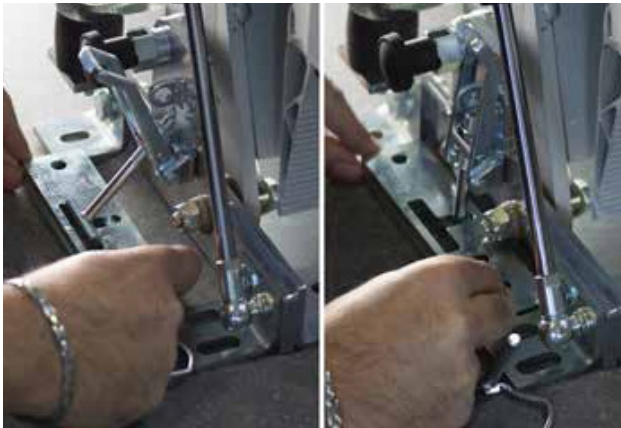



DI.MA. SRL

Strada Provinciale della Cerca, 39 - km 2
20060 Colturano (MI)
+39 02 30067412
info@dimarampe.com
ordiniclienti@dimarampe.com